


canc capping stone
to west & south walls.

Proprietary 2500x1200 glazed roof
by Roofglaze or similar company
breathable waterproof membrane
fixed to 19mm exterior grade ply
spanned to 100x50x400xC16
beam insulated with Kingspan
T10 between uprights, 1200g
visqueen & 125 f.b. plasterboard
+ scm

full width aps.

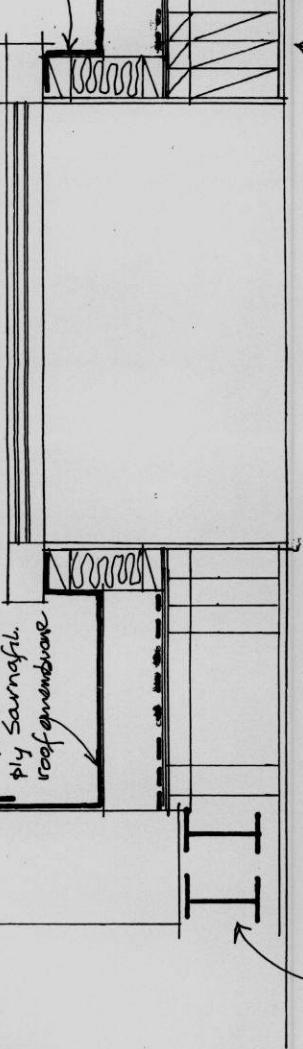

Apply single
ply Sarnafil
roof membrane


2 no 203x102x23 kg/mtr grade
S275 steel joists as calculations
bound with 1kg ms wire around
plasterboard as specifications.

3 no 200x75x c24 joists
bolted together as per calc's

brickwork to match
existing with cavities
closed at top.

2.66m to extend throughout ground
floor offset.

Fix steel intel over opening
to suit requirements of
bi-fold door installers.

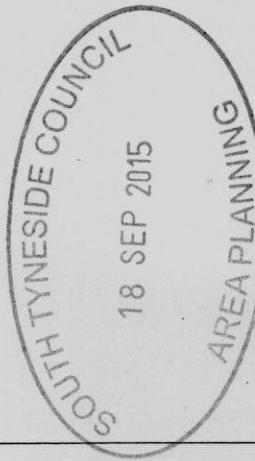


ST 0774 / 15 HFUL

Site concrete to be level with or
above outside ground level.

dpc
↓ external ground level

Floor to
spec ↓

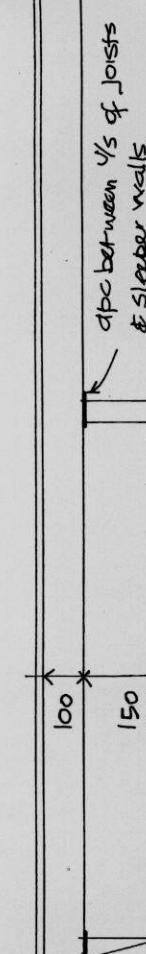

Existing timber floors to offset
to be raised to level of main rooms
of property

SECTIONAL ELEVATION TO LOUNGE

DRA 11/SGT/3 REV "A"

(Rev A 10/9/15 Redrawn to client revised requirements)

PROPOSED ALTERATIONS To 11, ST GEORGE'S TERRACE, EAST BOLDON, S.TYNESIDE, NE36 0LU.

SCALE 1:20