




EXISTING GROUND FLOOR

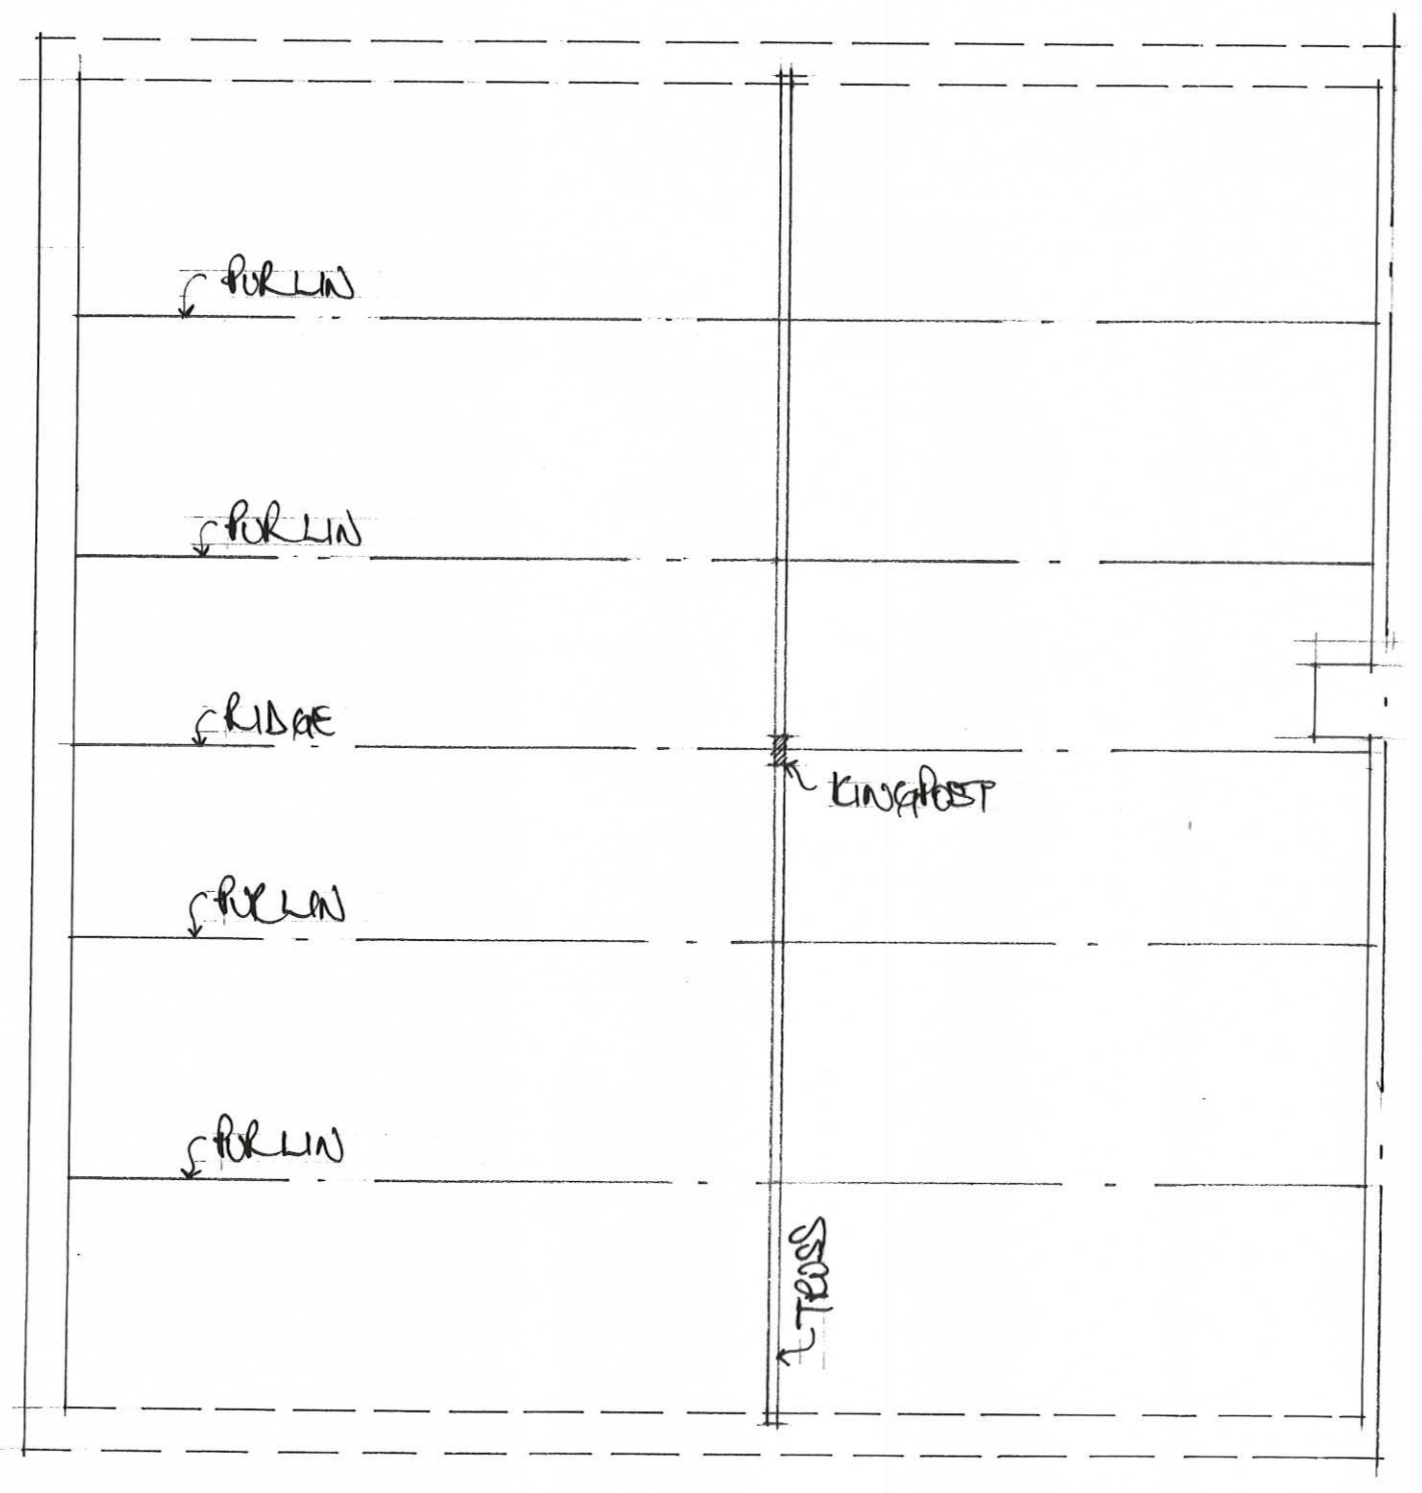


EXISTING ROOF PLAN

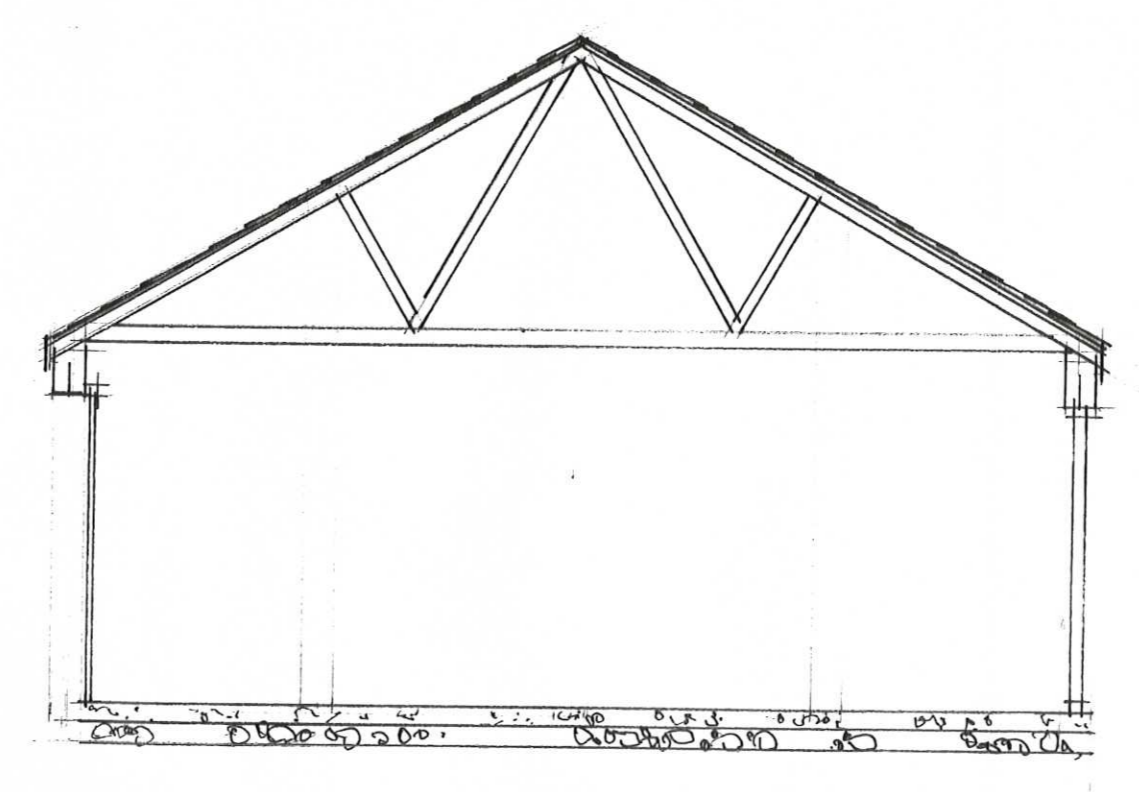


PROPOSED SECTION B B

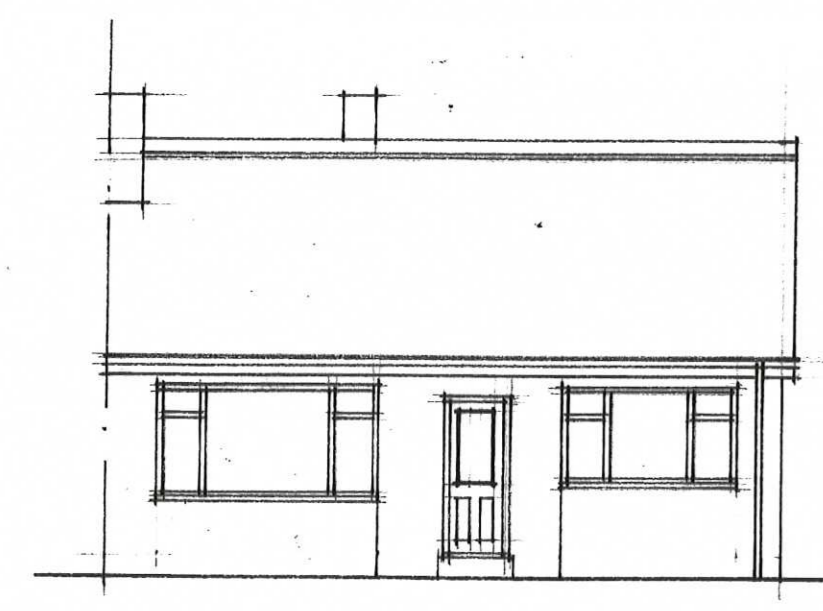


EXISTING FRONT ELEVATION

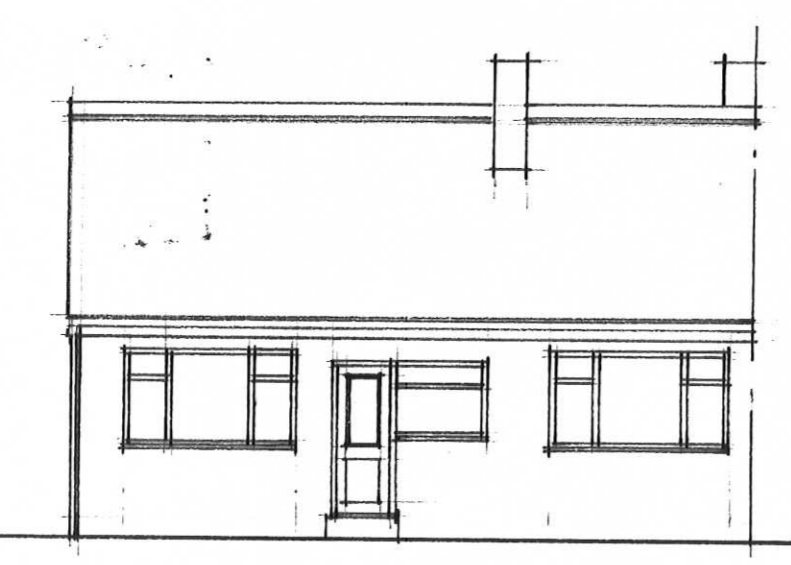


EXISTING REAR ELEVATION

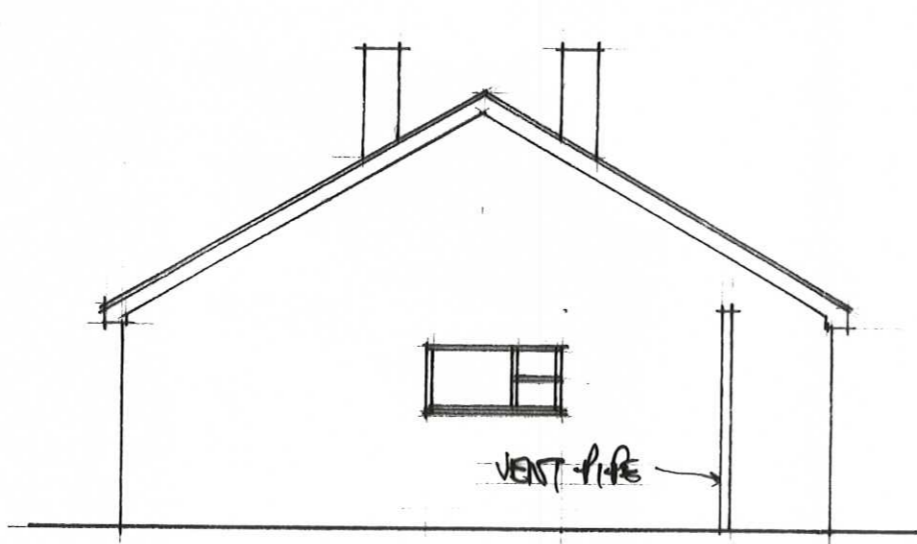

EXISTING SIDE ELEVATION

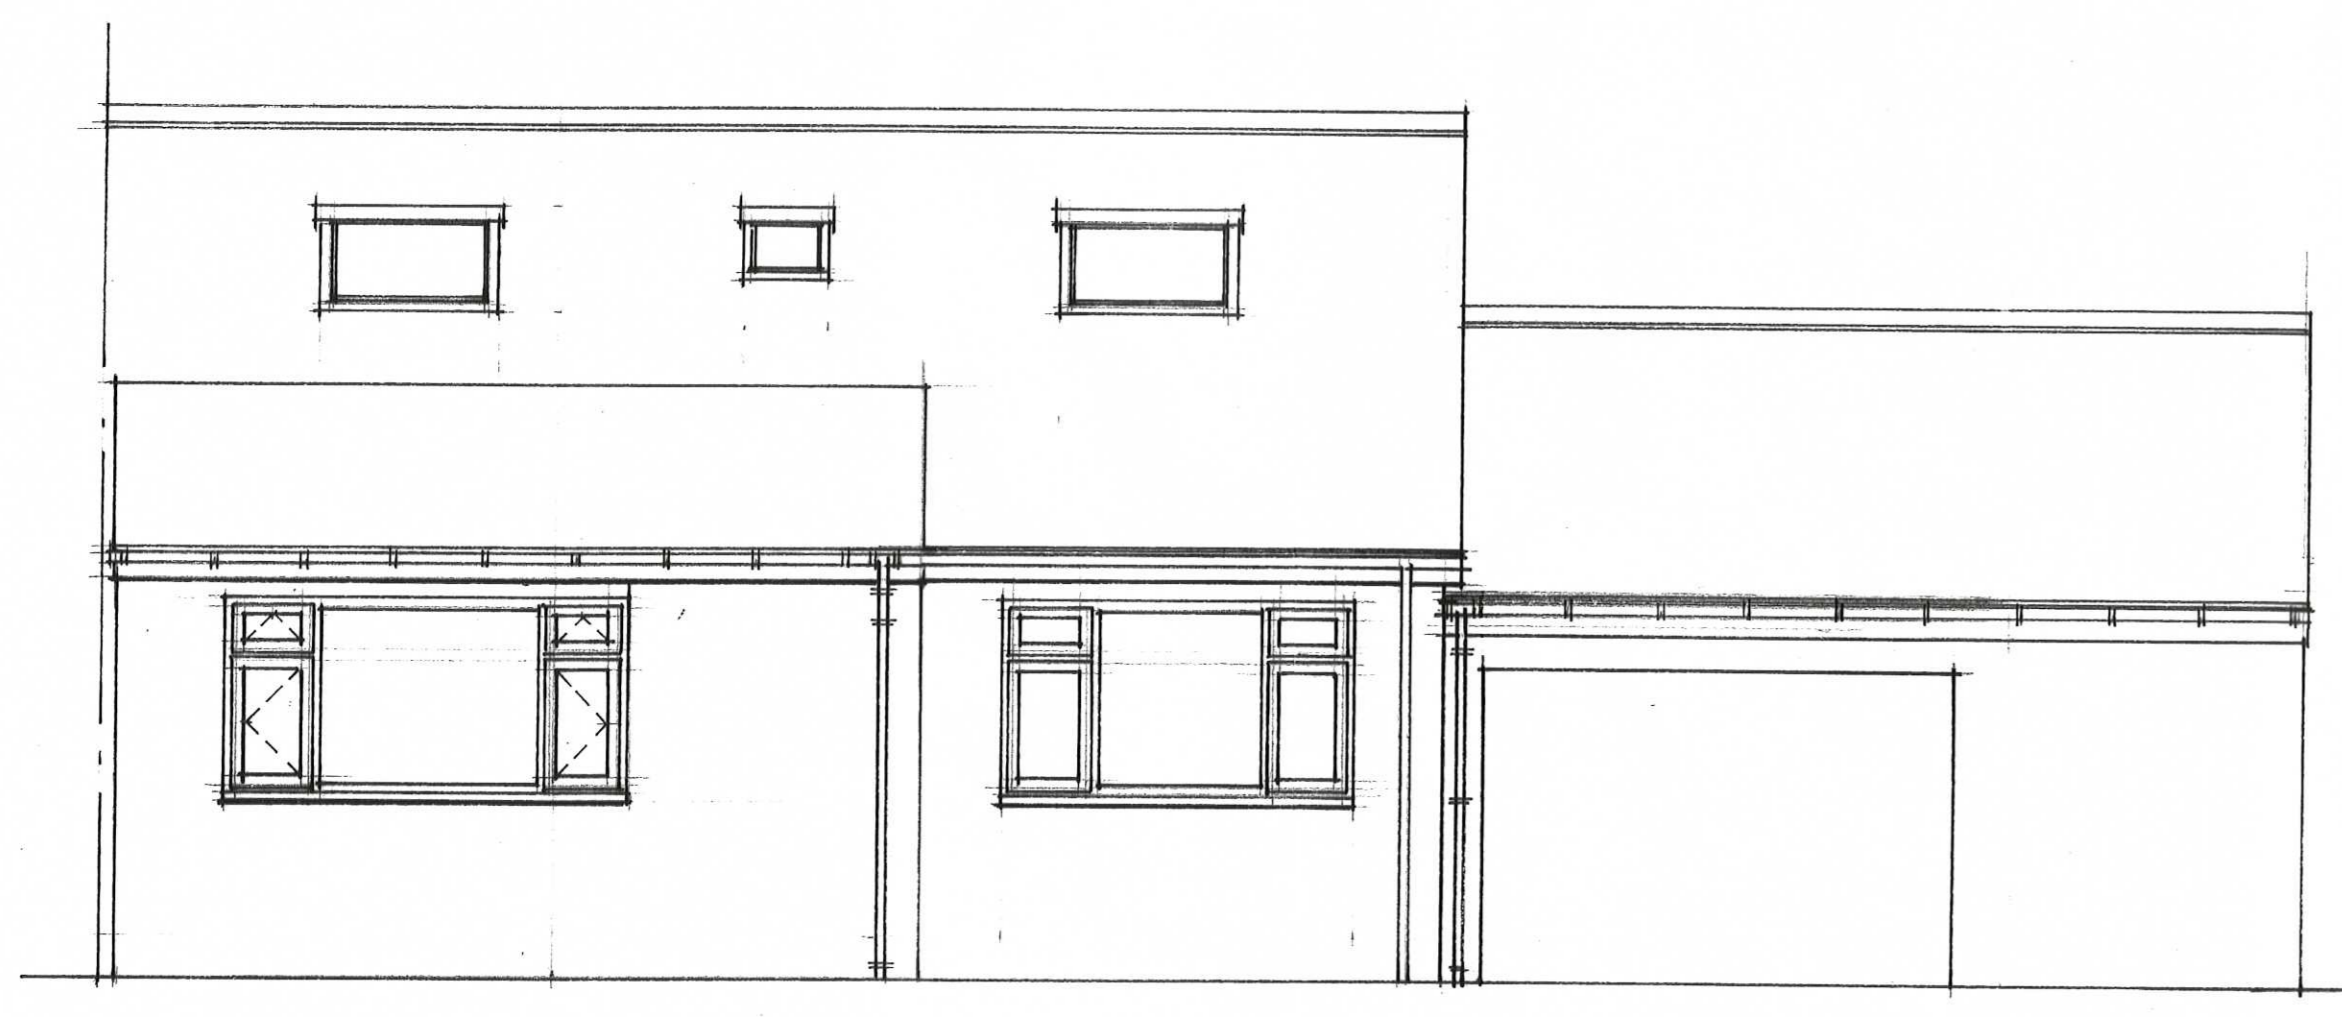

PROPOSED FRONT ELEVATION

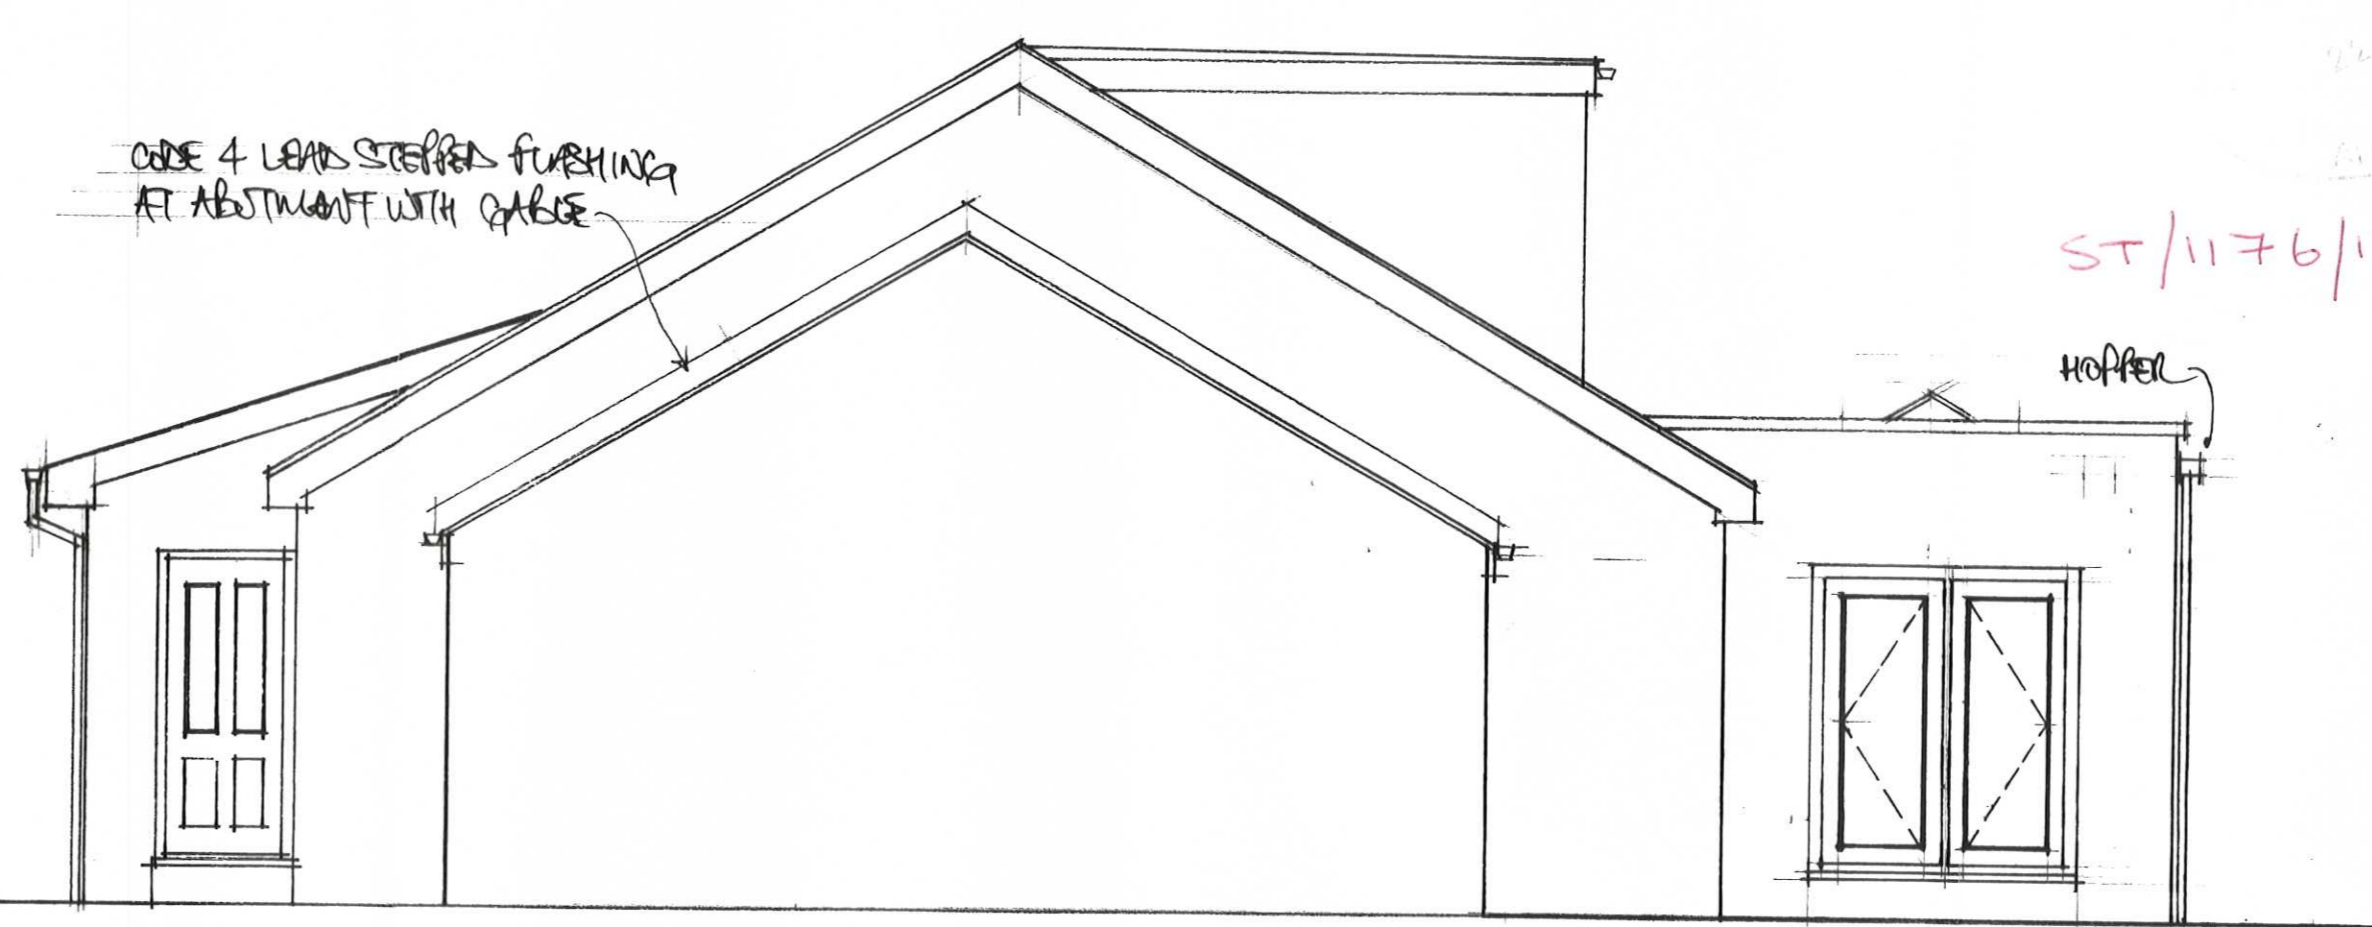

PROPOSED SIDE ELEVATION

AMENDED PLAN

GENERAL SPECIFICATION
PITCHED ROOF CONSTRUCTION
 GARAGE - CONCRETE ROOF TILES TO MATCH EXISTING ON 38x25mm TREATED BATTENS ON BREATHER UNDERLAY FELT ON TRUSS RAFTERS BY SPECIALIST MANUFACTURER BLAEND IN ACCORDANCE WITH BS 5498 RAFTERS SPACED AT 600mm CENTRES PROVIDE 1200 x 30 x 5mm RESTRAINT STRIPS AT 1.0m CENTRES AND ACROSS AND 3 RAFTERS
 LOUNGE - CONCRETE ROOF TILES TO MATCH EXISTING ON 38x25mm TREATED BATTENS ON BREATHER UNDERLAY FELT ON 125x40mm RAFTERS AT 400mm CENTRES SUPPORTED FROM LOWER FLOOR. PROVIDE 1200 x 30 x 5mm RESTRAINT STRIPS AT 1.0m CENTRES AND ACROSS AND 3 RAFTERS 100x20mm CEILING JOISTS AT 400mm CENTRES WITH 100mm FIRE RESISTANT INSULATION BETWEEN AND 120mm INSULATION CROSS Laid over

GARAGE FLOOR CONSTRUCTION
 100mm CONCRETE ON 1200 GAUGE DPM ON 25mm SAND BLINDING ON 120mm WELL COMBINED HANDSCOPE

LOFT FLOOR CONSTRUCTION
 Prime GRADE 1/2" MOISTURE RESISTANT CHIPBOARD ON 200x25mm FLOOR JOISTS AT 400mm CENTRES C/O GRADE TIMBER SUPPORTED FROM INTERNAL LOAD BEARING WALLS AND STEEL BEAM AS SPECIFIED

DORMER WALL CONSTRUCTION
 DORMER FRONT AND CHIMNEYS TO BE VITRUM TILE HUNG ON 37x125mm TREATED BATTENS ON UNBREATHABLE BREATHER UNDERLAY ON MAXIMUM STIPS AT 400mm CENTRES HORIZONTALLY AND 600mm CENTRES VERTICALLY. 100mm THERMOFLEX TPI INSULATION BETWEEN STIPS. 9.5mm PURCELBOARD AND SIM FINISH

AMENDMENTS	DATE
FRONT AND REAR EXTENSIONS REDUCED IN SIZE TO LOCAL AUTHORITY REQUIREMENTS	22/11/16
MR AND MRS WALLACE 69 LYNDON GROVE EAST BOLTON	
PROPOSED LOFT CONVERSION AND REAR AND SIDE EXTENSIONS	
SCALE 1:50 & 1:100	DATE OCT 2015

ST/1176/15/HF/16