

NOTES


All uPVC windows to be replaced with double glazed sliding sash hardwood timber windows.

All render to be carefully removed. If the existing masonry requires protection and render needs to be reapplied, Parex Heritage Lime Render (Parexal) colour T50 - Sandy Earth) or similar should be used. Under no circumstances should the masonry by sandblasted. If the masonry is sound then it may be possible to repoint it and leave it on show.

The scheme will be fitted throughout with a sprinkler system designed and installed in accordance with BS9251:2005

All SVP locations to be desingned by a specialist designer.

All floors to form a complete barrier to fire between flats/compartments. All existing floors to be protected from the underside to a 60m fire resistance.

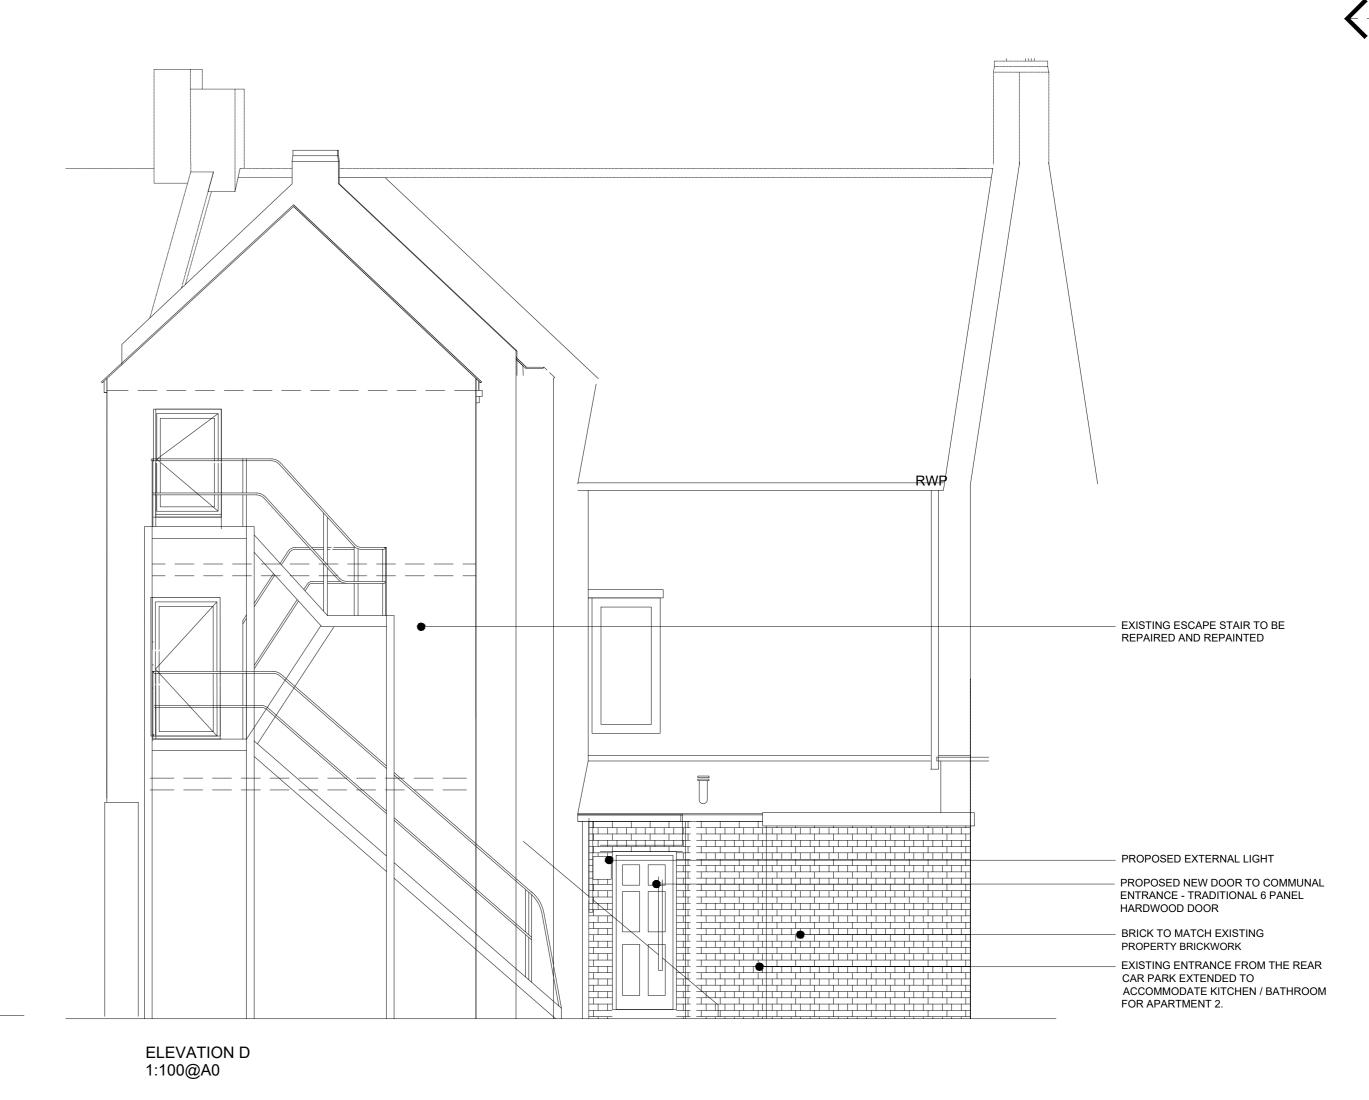

Suitability P01.01 Date Drawn By Checked B' DB SITE LAYOUT AMENDED TO SUIT PRE-APPLICATION COMMENTS

 Model File Name: RES736-BHA-00-ZZ-M2-A-1500

 Drawn By:
 Date Drawn:

 GS
 16/08/19

 Checked By:
 Date Checked:


 DB
 19/08/19

 Scale at A0:
 Suitability:
 Revision:

 AS INDICATED
 S4
 P01.07

File Name:
RES736-BHA-00-ZZ-DR-A-1601

© Blake Hopkinson Architecture L.L.P.

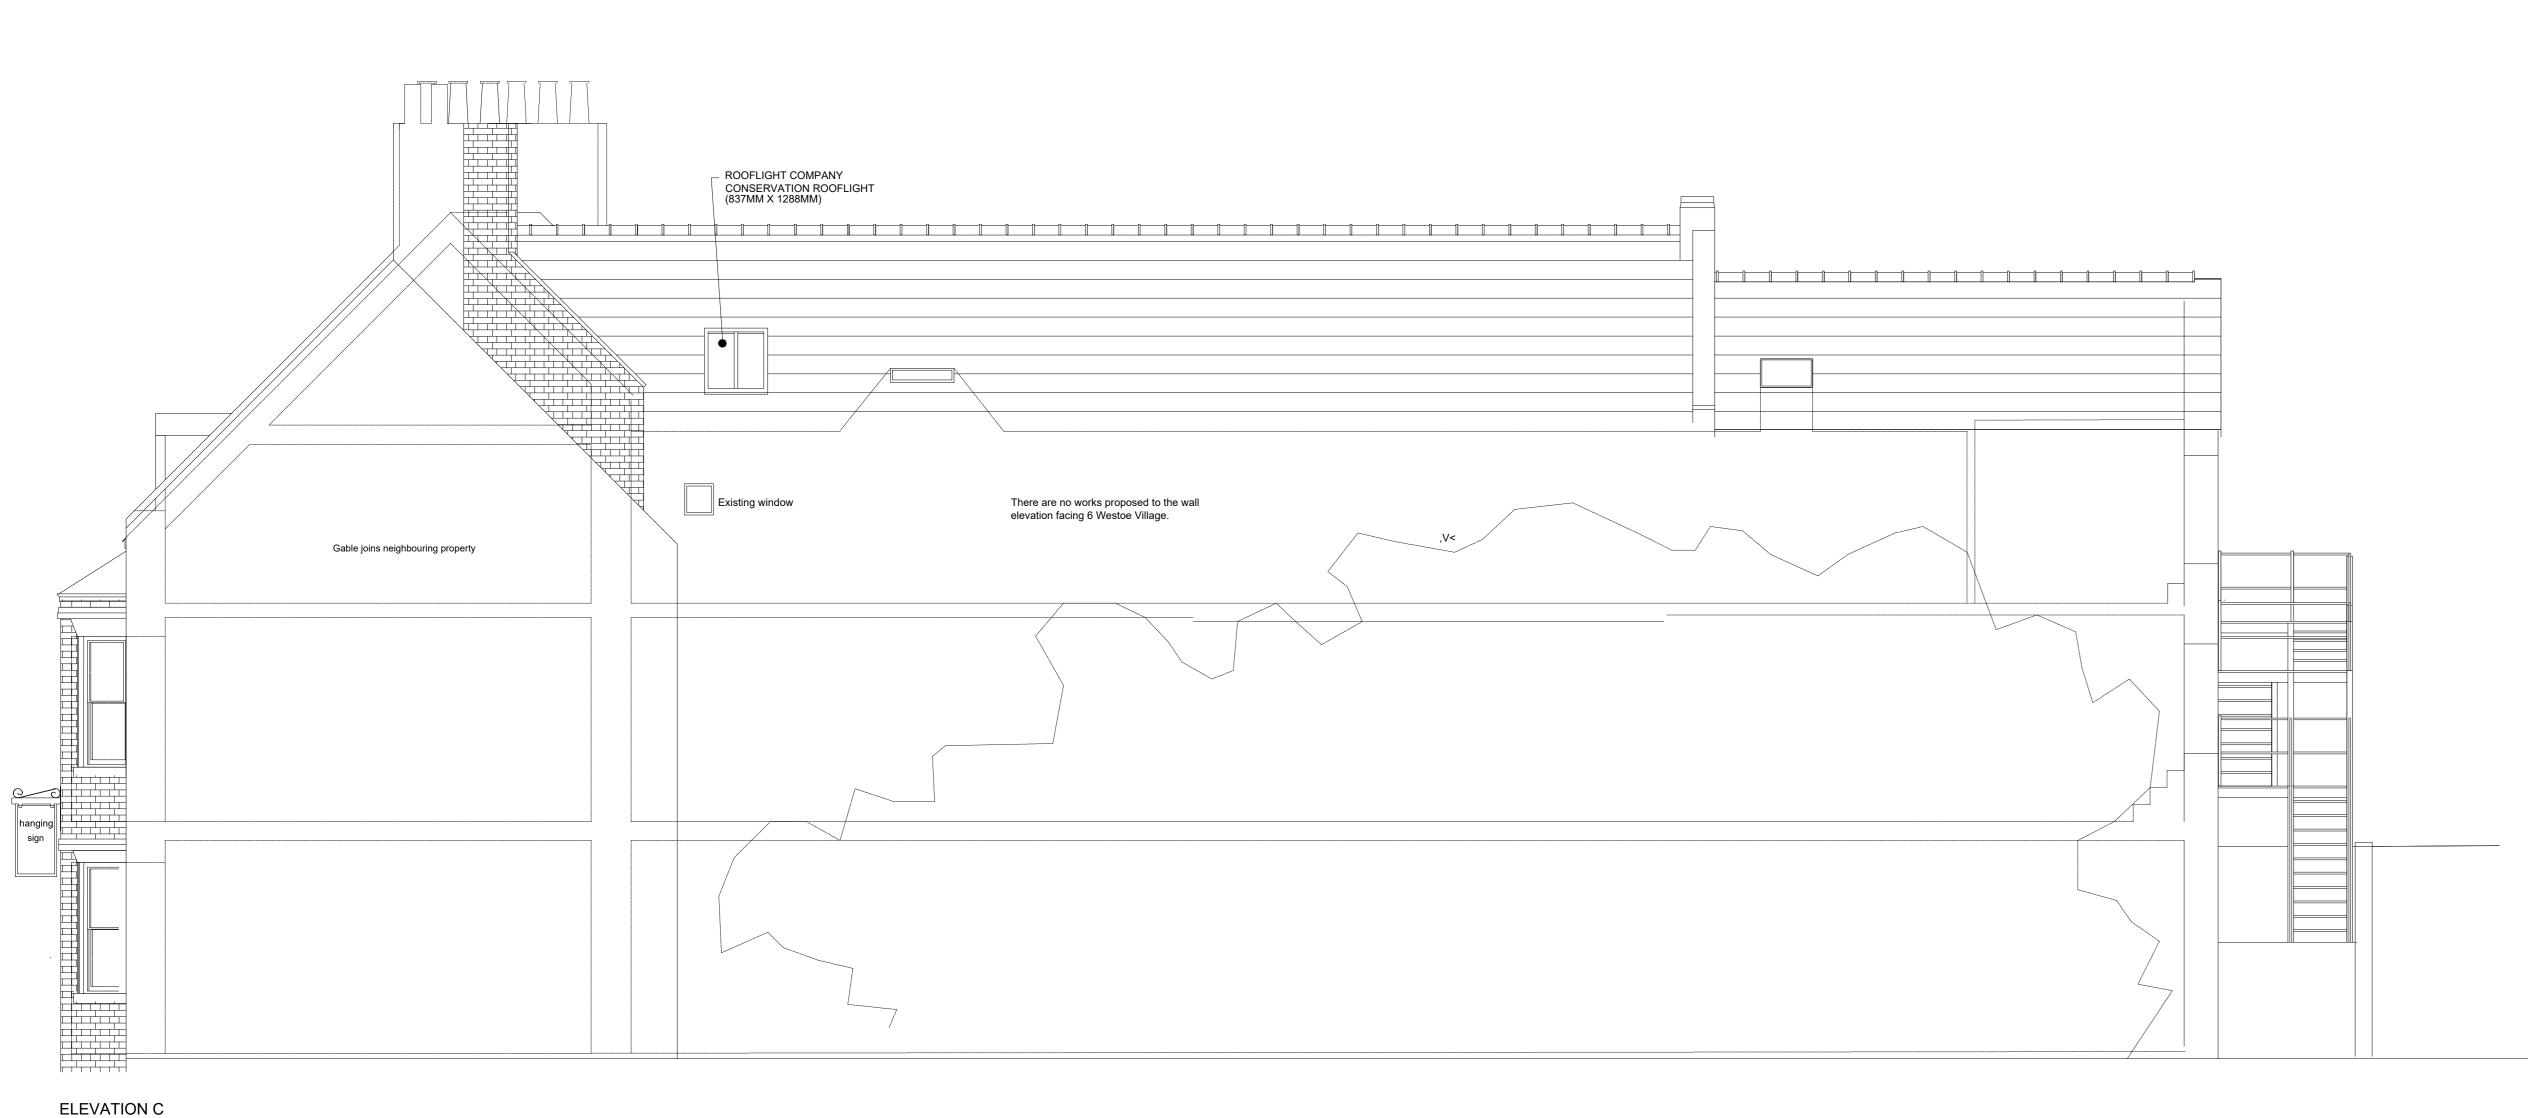

ELEVATION A

1:50@A0

1:100@A0

Bolier Estract

Bolier Estract