
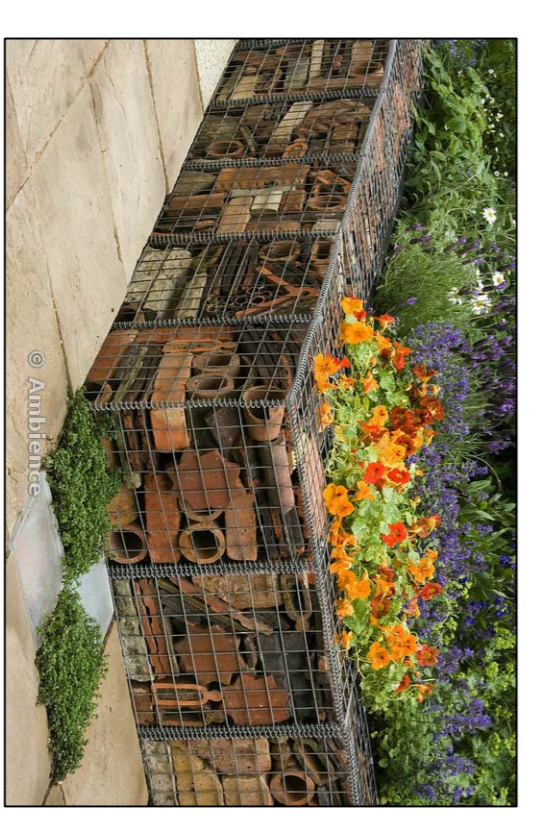


**NOTES**

1. Sub sites in all areas to be recycled to ensure hard landscape materials comply with BRE Green Guide A+A ratings required for BREEM+ - refer to engineers details and specification for details in main specification (for approval prior to construction) to ensure suitability of gabion detailing for proposed purpose and structural stability based on site conditions.
2. Indicate gabion mesh size - 50mm maximum, details to be agreed following submission of detailed proposals by gabion manufacturers.

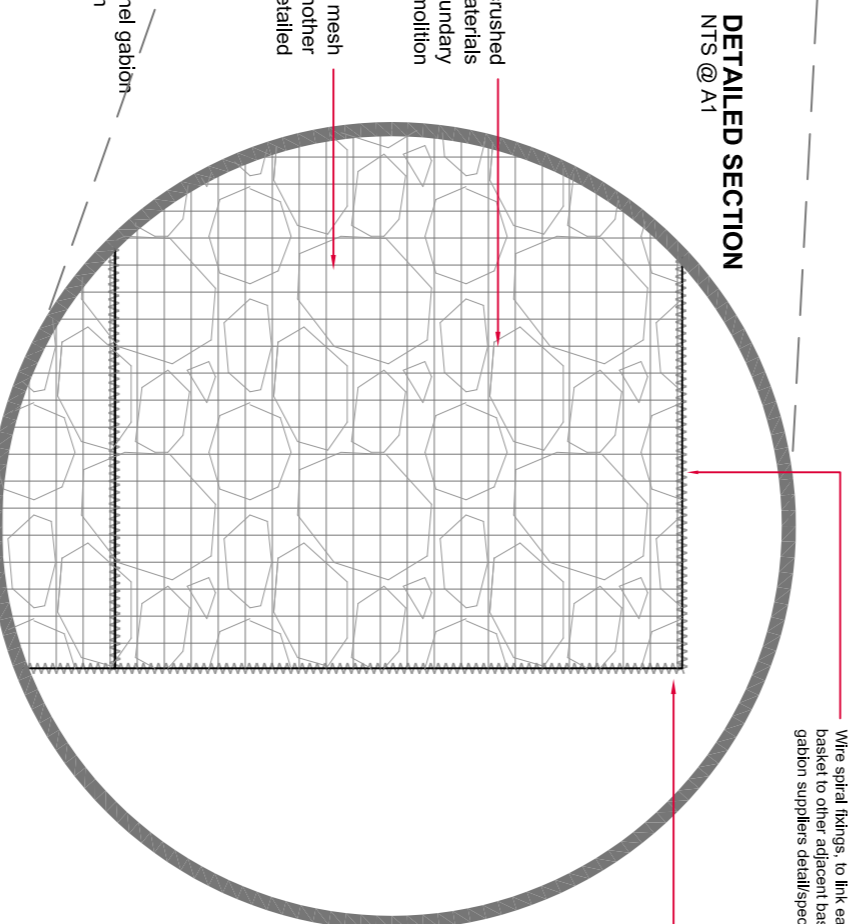

**SITE PHOTOGRAPHS OF EXISTING MATERIALS ON SITE**

(materials to be carefully salvaged as part of demolition and stored either on site, or in safe secure location off site for re use as feature fill materials for gabion walls as shown, features materials to be placed by hand in prominent locations within gabion baskets, layout of materials to be agreed on site. General back fill material to make up the rest of the gabions is to be whole bricks and brick rubble salvaged from the demolition of the existing building and boundary walls on site. Prior to starting on site the contractor is to undertake a site walk to identify all materials that can be salvaged and to ensure that the amount of waste generated, all feature materials are to be reduced to a minimum. All feature materials are to be identified and labelled with a minimum number which have been identified. Any traditional clay drainage pipes or other materials discovered as part of the site excavation works should also be made available for reclamation and re use)



**SAFETY, HEALTH & ENVIRONMENTAL INFORMATION**

In addition to the hazards / risks normally associated with the types of work detailed on this drawing, note the following:

Construction and site maintenance / Cleaning  
1. No abnormal risk  
Dismantling / Demolition  
1. No abnormal risk

It is assumed that all works will be carried out by a competent contractor, working where appropriate, to an approved method statement. This is not an exhaustive list and reference should be made to the Health and Safety Plan.

Rev.	CDM	By	CHK.	Date.	LHA	RS	06.07.16
B	Minor amendments to account for revised building ground floor layout and BREEM+ requirements	yes	LH4	RS	26.05.16		
A	Revised in accordance with approved VE initial issues for comment.	yes	LH4	RS	17.12.14		

**Client:** South Tyneside NHS Foundation Trust

**Dwg:** Feature Wall Details and Elevations

**Scale:** as shown @ A1

**Date:** 01.11.14

**Drawing No:** 89\_121

**Rev:** B

**Loc:** NE34

**southern**  
green  
CHANGING LANDSCAPE ARCHITECTS

21 Durham Road  
Gateshead  
NE8 5AB  
Tel: 0191 440 0034  
Fax: 0191 420 3460  
info@southern-green.co.uk