



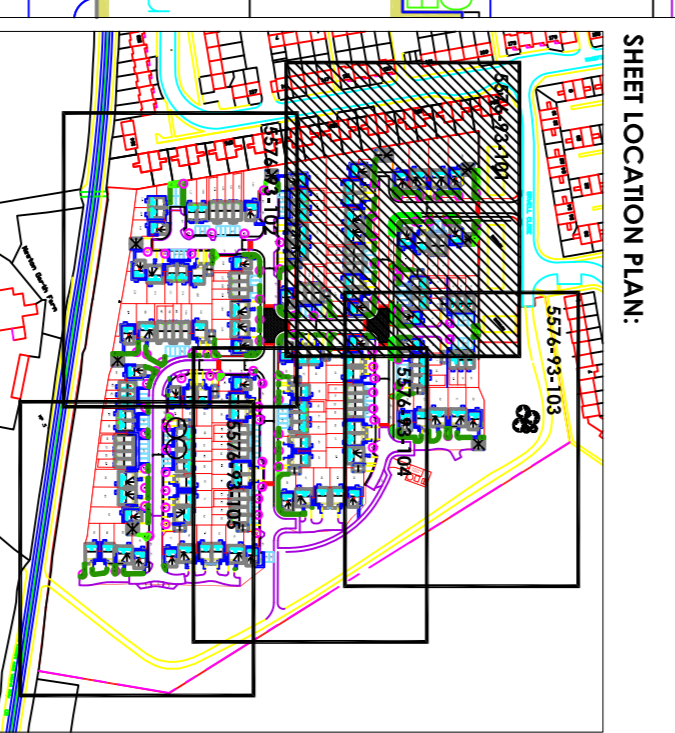
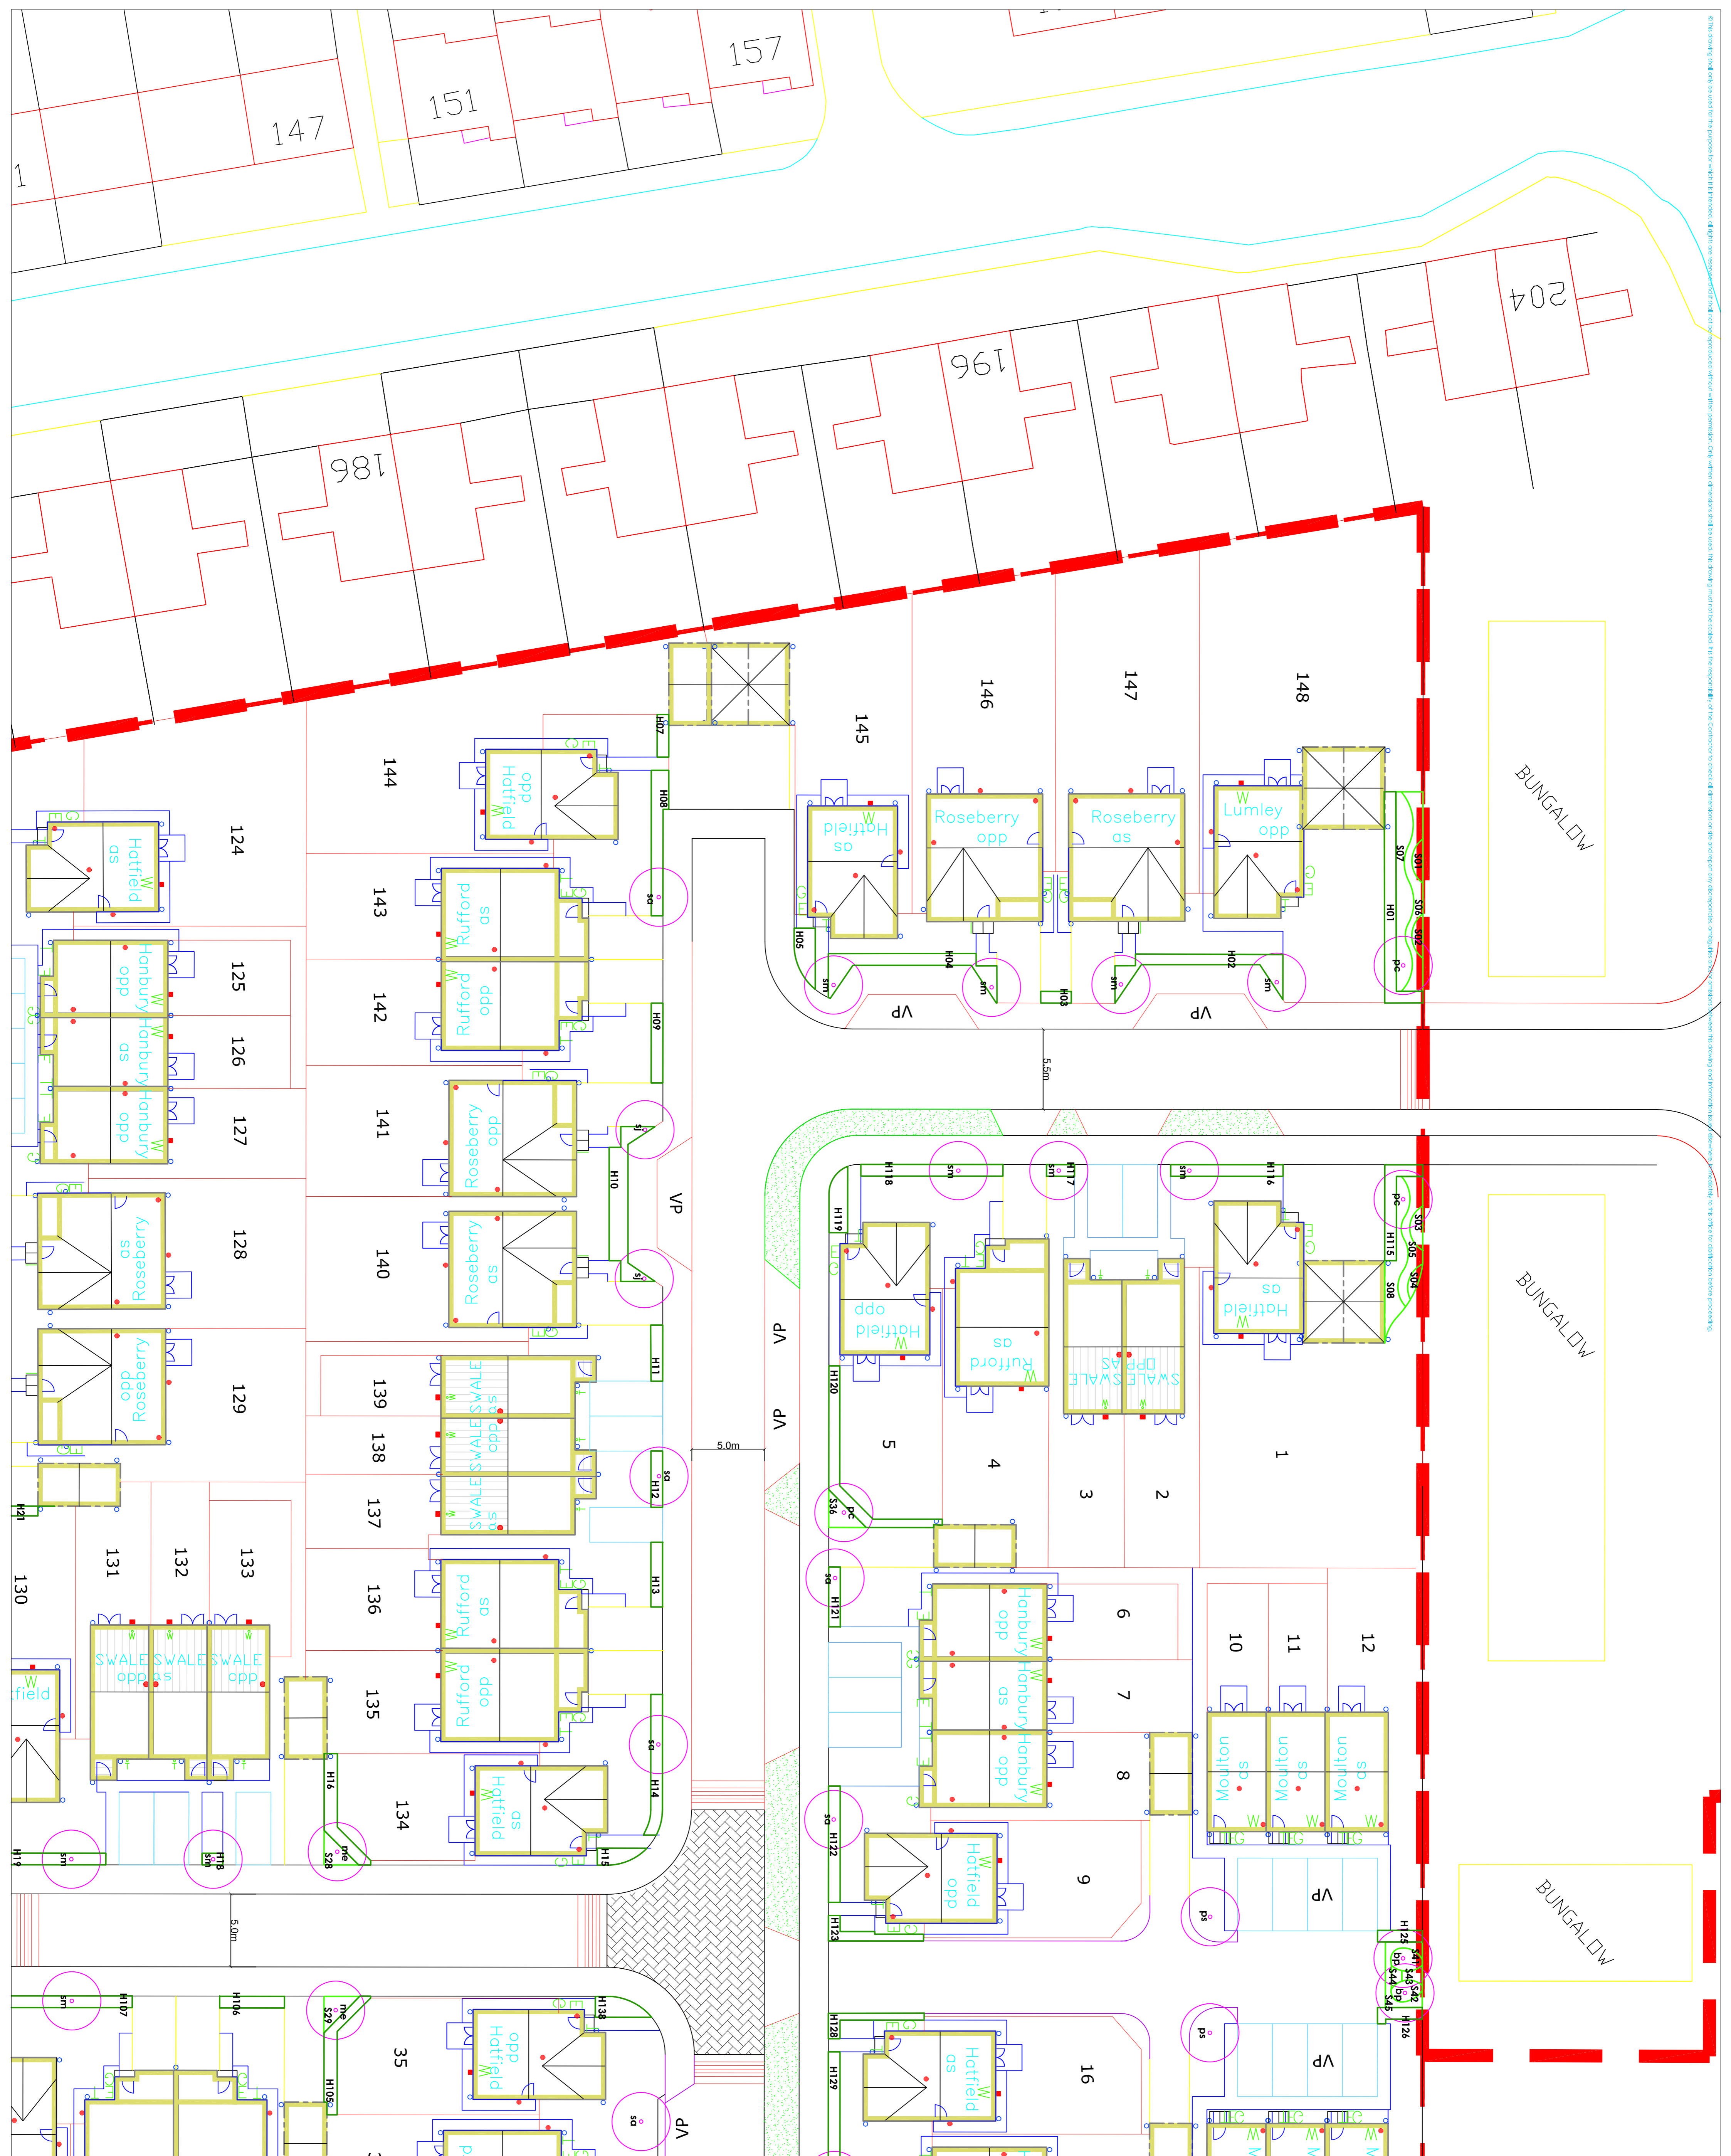


LEGEND:

-  Proposed Hedging
-  Proposed Specimen Trees
-  Proposed Shrubs
-  Site Boundary

NOTES:

- For fronting Schedule see drawing number 557-793-106
- All works to be carried out in accordance with best horticultural practice and to the latest British Standards.
- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.
- Planting within sightlines shall not exceed 600mm height. Standard trees shall be ordered so that their stems do not present a wall within visibility gaps.
- No tree planting shall occur within 2m of underground services (including power lines) or any other product by Greenleaf (or similar approved), or within 2m of overhead cables.
- All topsoil to BS 3882: 1994 Premium Grade, amended with fertilizer and soil conditioner.
- All Extra Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm topsoil and 150mm drainage. All trees to be securely staked.
- Ornamental shrubs will be planted in prepared 450mm deep beds, backfilled with amended topsoil
- Grass seeding to be carried out on prepared seedbeds, topsoil min depth 150mm.
- All planting to be carried out in season (November to March). Program may require preparation of planting areas during the summer but these will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting 'out of season' all stock will be watered before and after planting.
- All planting subject to minimum 12months concurrent maintenance and defects liability period.



PROJECT: BIDDOCK HALL

CLIENT: Bidcock Hall

DATE: 23/09/2013

SCALE: 1:1

PROJECT NO: 1450

DATE: 23/09/2013

PROJECT NO: 1450

DATE: 23/09/2013

PROJECT NO: 1450

DATE: 23/09/2013