


LEGEND:

	Proposed Hedging
	H109
	Proposed Specimen Trees
	Proposed Shrubs
	Site Boundary

NOTES:

- For Planting Schedule see drawing number 50/6/23-106
- All works to be carried out in accordance with best horticultural practice and to the latest British Standard.
- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.
- Planting within a height shall not exceed 600mm height. Specimens shall be added 50mm from stems 50/70 present a wall within viability spray.
- No tree planting shall occur within 2m of underground services or drainage runs without tree root management product by Greenleaf (or similar approved), or within 2m of overhead cables.
- All trees to be BS 2822: 1994 Premium Grade, orientated with feller and soil conditions.
- All Extra Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm clearance around footfall, backfilled with ameliorated topsoil. All trees to be securely staked.
- Ornamental shrubs will be planted in prepared 450mm deep beds, backfilled with ameliorated topsoil
- Grass seeding to be carried out on prepared seedbed, topsoil min depth 150mm.
- All planting to be carried out 'in season' (November to March). Planting outside this period will be carried out in the summer but these will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting 'out of season' all work will be watered-in before and after planting.
- All planting subject to minimum 12months concurrent maintenance and defect liability period.

SHEET LOCATION PLAN:

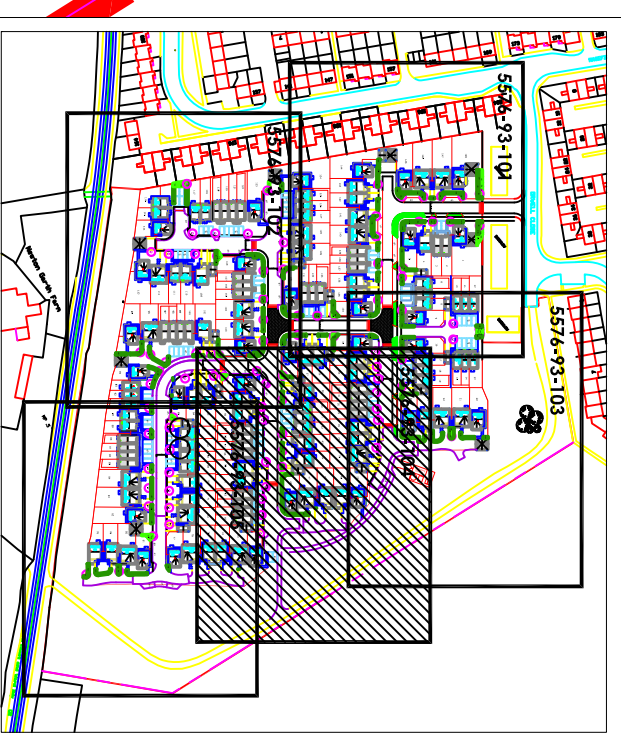

NO.	REV.	DATE	DESCRIPTION
1	1	18.12.15	Issued for tender
2	1	27.10.15	Revised drawings to include tender items
3	1	09.08.15	Revised drawings to include tender items
4	1	10.07.15	Revised drawings to include tender items



BIDDICK HALL

DETAILED PLANTING PROPOSALS

Drawing No:	1480
Drawing Location:	1480
Scale:	1:100
Client:	Bid Dick Hall
Project:	Bid Dick Hall
Date:	23/09/2013
Checked:	IR
Drawn:	IR

