© This drawing shall only be used for the purpose for which it is intended, all rights are reserved and it shall not be reproduced without written permission. Only written dimensions shall be used. This drawing must not be scaled. It is the responsibility of the Contractor to check all dimensions on site and report any discrepancies, ambiguities and/or omissions between this drawing and information issued elsewhere, immediately to this office for clarification before proceeding.

LEGEND:

- Proposed Hedging (H09)
- Proposed Specimen Trees (sj)
- Proposed Shrubs (S01, S07)
- Site Boundary

NOTES:

- For Planting Schedule see drawing number 5576-93-106

- All works to be carried out in accordance with best horticultural practice and to the latest British Standards.

- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.

- Planting within sightlines shall not exceed 600mm height, standard trees shall be aligned so that their stems do not present a 'wall' within visibility splays.

- No tree planting shall occur within 2m of underground services or drainage runs without tree root management product by Greenleaf (or similar approved), or within 2m of overhead cables.

- All topsoil to BS 3882: 1994 'Premium Grade', ameliorated with fertilizer and soil conditioner.

- All Extra Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm clearance around rootball, backfilled with ameliorated topsoil. All trees to be securely staked.

- Ornamental shrubs will be planted in prepared 450mm deep beds, backfilled with ameliorated topsoil

- Grass seeding to be carried out on prepared seedbed, topsoil min depth 150mm.

- All planting to be carried out 'in season' (November to March). Program may require preparation of planting areas during the summer but these will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting 'out of season' all stock will be watered-in before and after planting.

- All planting subject to minimum 12months concurrent maintenance and defects liability period.

SHEET LOCATION PLAN:

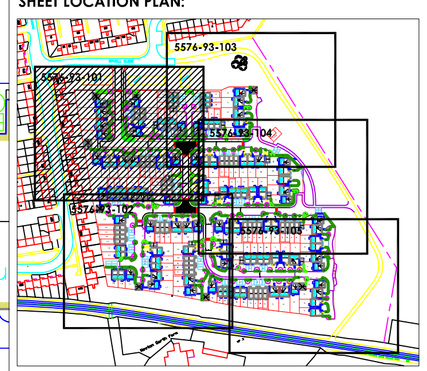

Rev.	Drawn	Date	Comments
B	SN	09.08.13	Planting amendments
A	SN	10.07.13	Planting amendments

North

Robinson Landscape Design
Cathedral Buildings, Dean Street
Newcastle upon Tyne NE1 1PG
Tel: 0191 230 4339 Fax 0191 230 5509
info@robinsonlandscapedesign.co.uk

Project
BIDDICK_HALL

Drawing name
DETAILED_PLANTING_PROPOSALS

Drawing No:		Scale at A1:
5576-93-101		1:200
Drawing Location: S:\5576-BIDDICK_HALL\-93\5-93-SOFT_WORKS		
Drawn: SN	Checked: TR	Date: 23/05/2013