



LEGEND:

	Proposed Hedging
	Proposed Specimen Trees
	Proposed Shrubs
	Site Boundary

NOTES:

- For Planting Schedule see drawing number 557.6/3.106
- All works to be carried out in accordance with best horticultural practice and to the latest British Standards.
- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.
- Planting within sightlines shall not exceed 600mm height, however, small shrubs up to 1.5m height may be planted in a void within visibility gaps.
- No tree planting shall occur within 2m of underground services or drainage runs without tree root management product by Greenleaf (or similar approved) or within 2m of overhead cables.
- All topsoil to BS 3883: 1994 'Premium Grade', ameliorated with fertilizer and soil conditioner.
- All Extra Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm clearance around rootball, backfilled with ameliorated topsoil. All trees to be securely staked.
- Ornamental shrubs will be planted in prepared 450mm deep beds, backfilled with ameliorated topsoil
- Grass seeding to be carried out on prepared seedbed, topsoil min depth 150mm.
- All planting to be carried out in season (November to March), however, trees will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting out of season, all stock will be watered in before and after planting.
- All planting subject to minimum 12months' concurrent maintenance and defect liability period.

SHEET LOCATION PLAN:

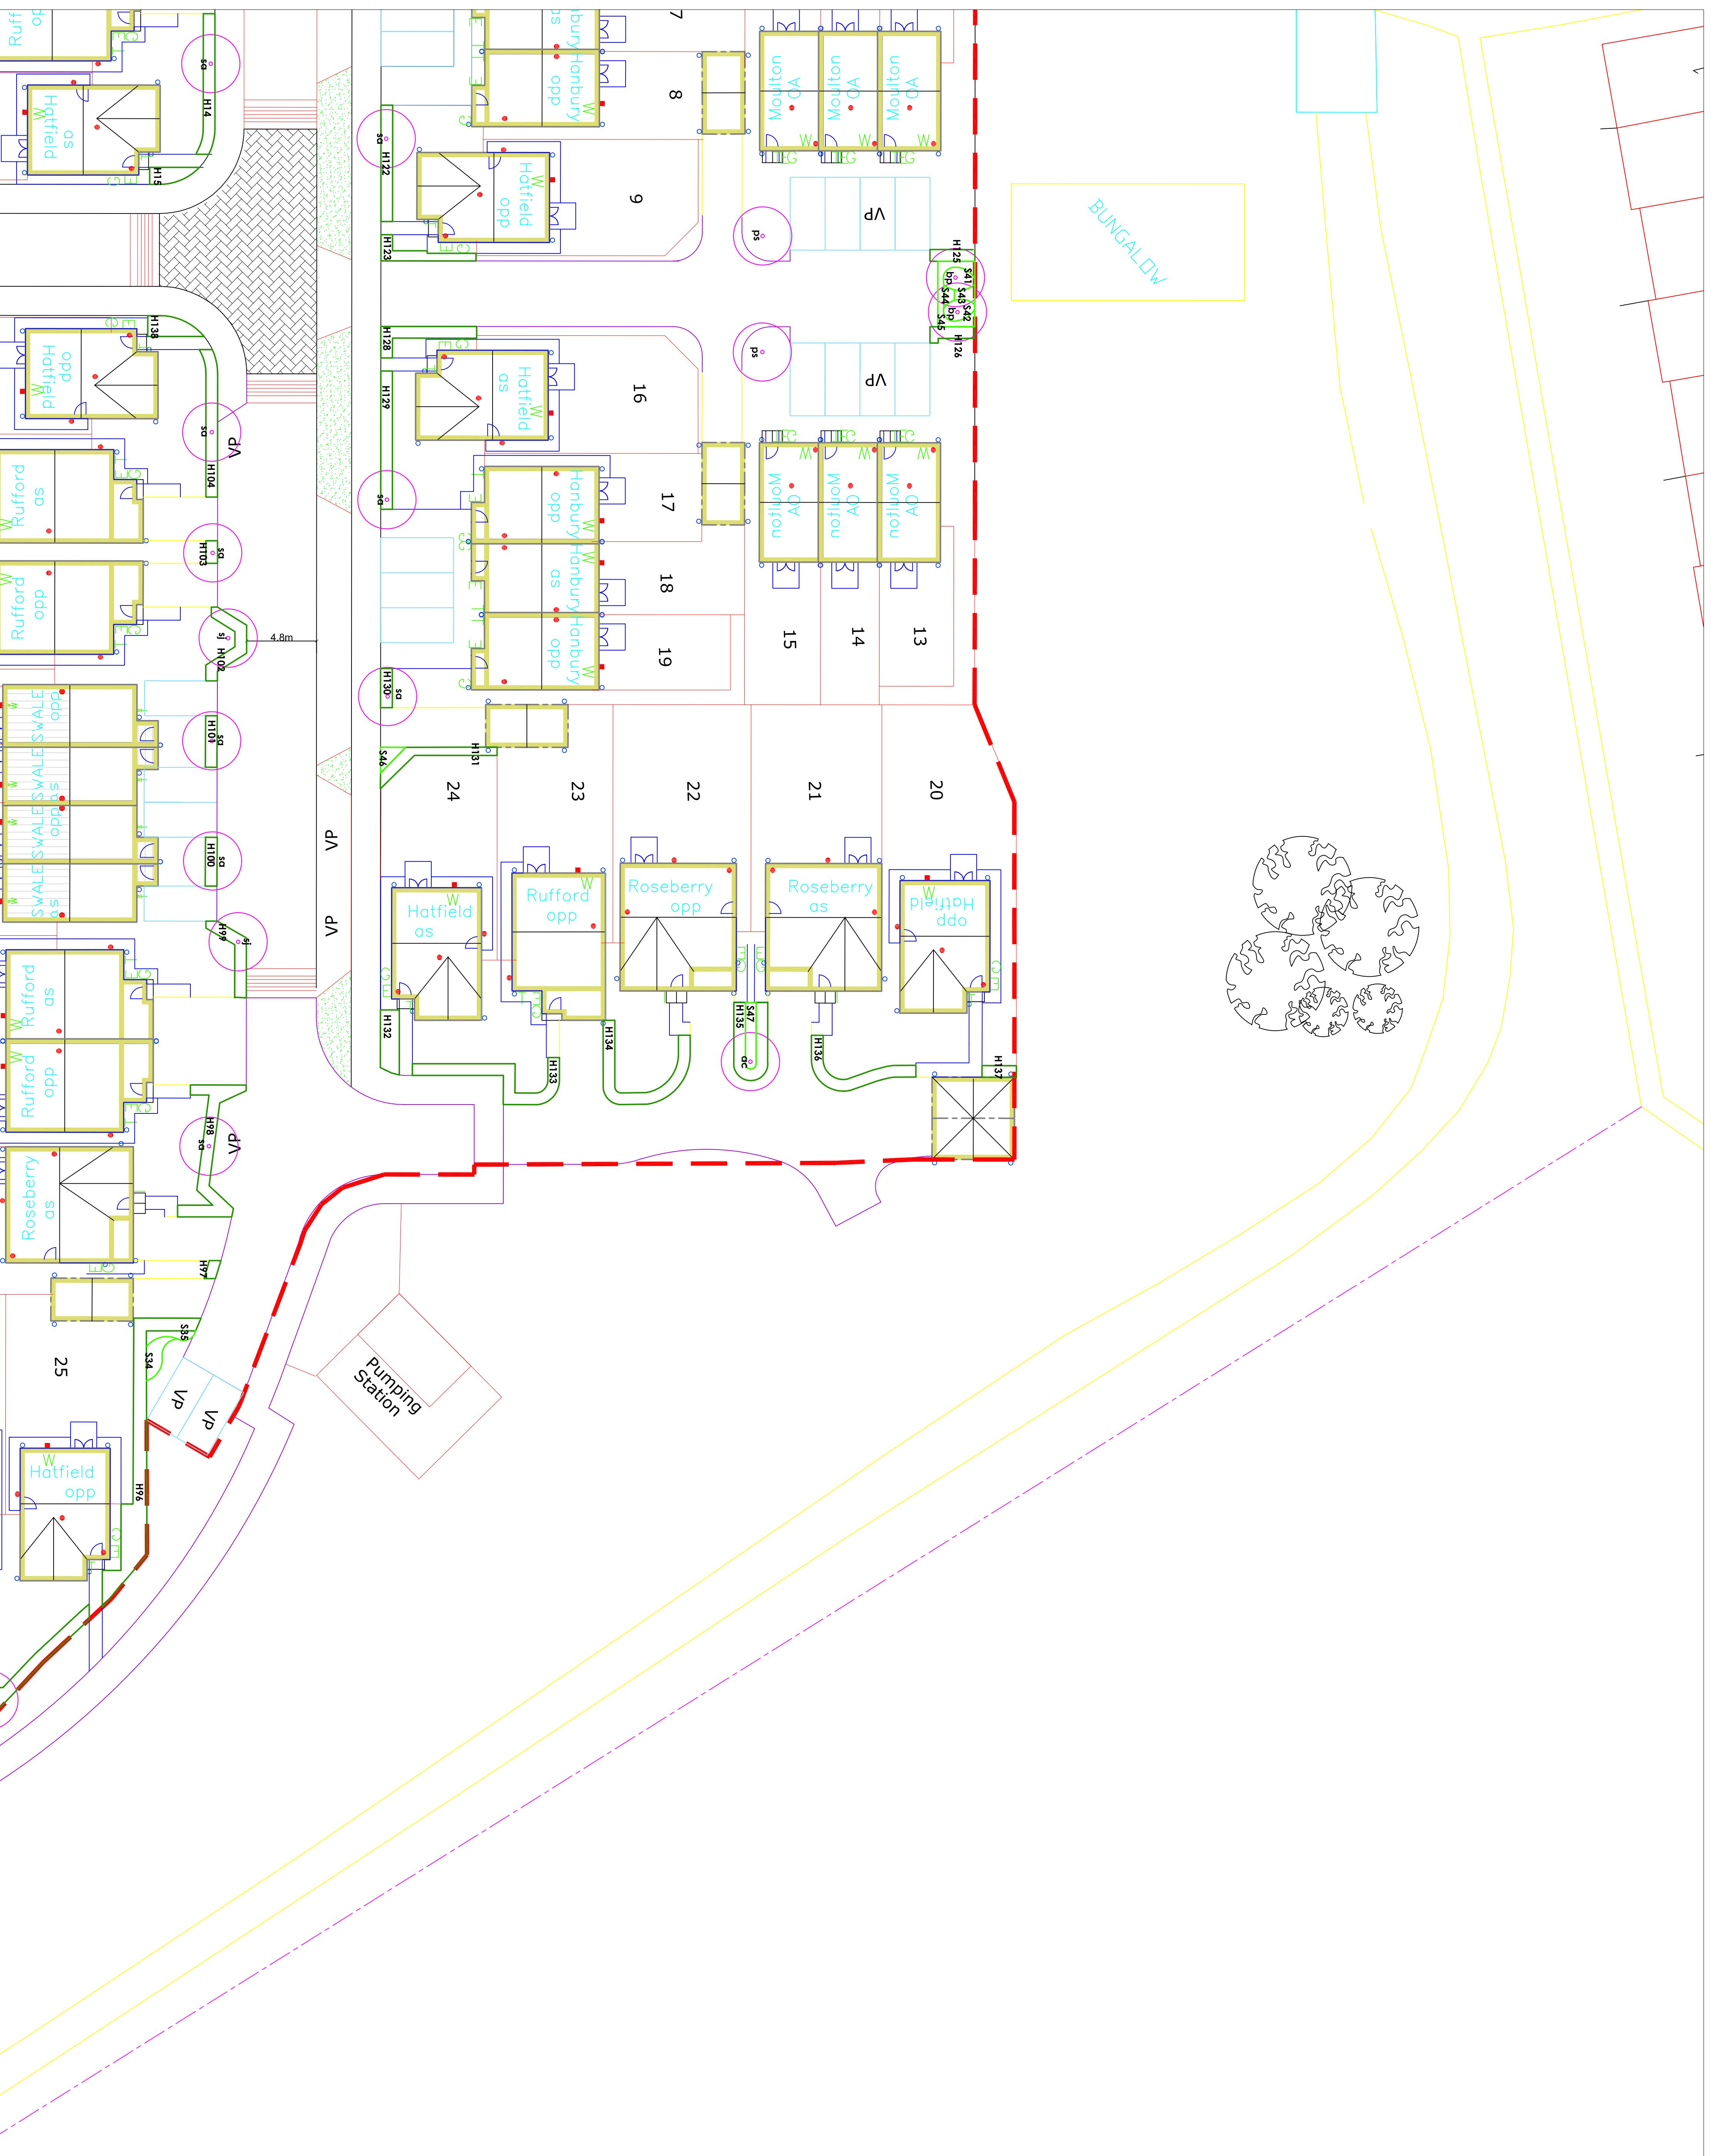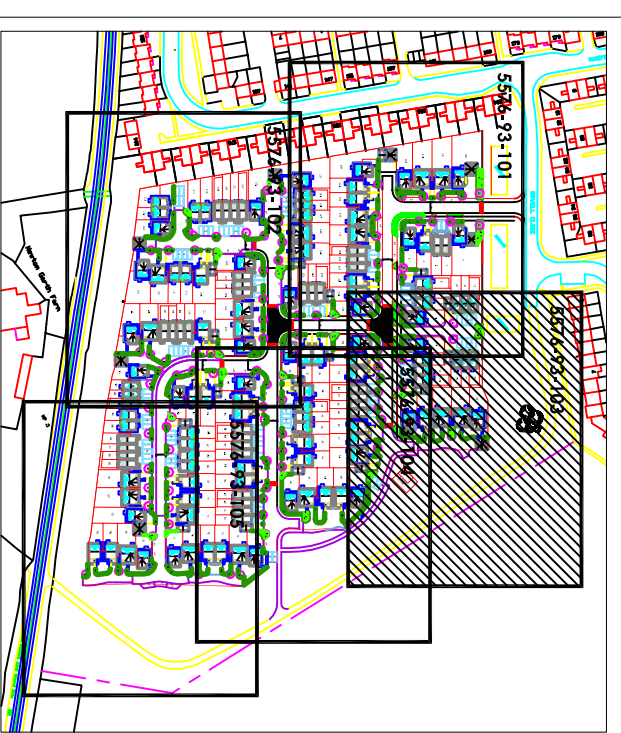

Project: BIDDOCK HALL

Drawing name: DETAILED PLANTING PROPOSALS

Drawing No: 1/20

Drawing Location: 1/20

Scale of A1: 1:500

Date: 23/09/2013

Checked: IR

Drawn: IR