


LEGEND:

| | |
|--|-------------------------|
| | Proposed Hedging |
| | Proposed Specimen Trees |
| | Proposed Shrubs |
| | Site Boundary |

NOTES:

- For Planting Schedule see drawing number 50/493-106
- All works to be carried out in accordance with best horticultural practice and to the highest British Standard.
- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.
- Planting within sightlines shall not exceed 450mm height - ground level and shall be no less than 100mm from any vertical wall within visibility splay.
- No tree planting shall occur within 2m of underground services or drainage runs without tree root management product by Greenleaf (or similar approved), or within 2m of overhead cables.
- All local to BS 3883: 1994, Premium Grade, ameliorated with fertilizer and soil conditioner.
- All Ericc Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm clearance around football, backfilled with ameliorated topsoil. All trees to be securely staked.
- Commercial plants will be admitted in prepared 450mm deep beds, backfilled with ameliorated topsoil
- Grass seeding to be carried out on prepared seedbed, topsoil min depth 150mm.
- All planting to be carried out in season (November to March), from autumn onwards. Plants should be well established in summer but these will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting out of season, all stock will be watered-in before and after planting.
- All planting subject to minimum 12months concurrent maintenance and defect liability period.

SHEET LOCATION PLAN:

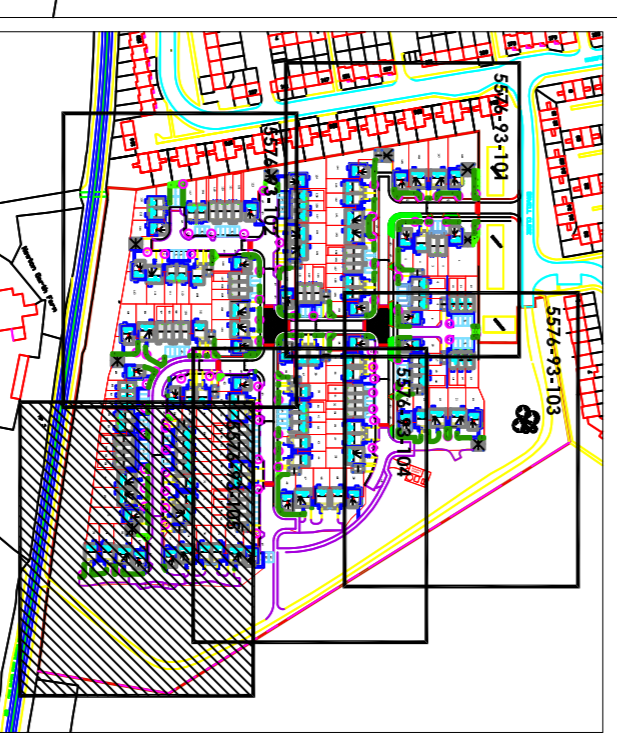

Project: **BIDDICK HALL**

DETAILED PLANTING PROPOSALS

| | |
|-------------------|------------|
| Drawing No: | 1490 |
| Drawing Location: | |
| Author: | |
| Checked: | |
| Date: | 20/09/2013 |
| Drawn: | IR |