

Our Ref: D3817/APT
Linda Worthing
Bellway House
Kings Park
Kingsway North
Gateshead
Tyne and Wear
NE11 0JH

Date: 28th October 2016

Dear Linda,

Inspection of Topsoil thickness – Bellway Apartments Cleadon Vale, King George Road, South Shields.

Dunelm were instructed by Bellway Homes to visit the above site, measure the depth of the newly placed clean cover layer and ensure that a minimum of 150mm topsoil and 450mm of subsoil has been placed. The placement of the cover layer and/or topsoil will continue to be carried out in stages and this letter report covers the area of the Apartment blocks 359-374.

A detailed remediation strategy was prepared for Bellway Homes (Dunelm Report No. D3817/1).

This report indicates that where made ground containing unsuitable items (such as glass, brick etc.) exists at formation level within garden and landscaped areas, a clean cover layer is provided (comprising 450mm clean sub soil/sand and a minimum of 150mm clean topsoil).

A Dunelm Engineer visited the site on 26th July 2016, the 5th August 2016, the 20th October 2016 and the 27th October 2016 and inspected the landscaped areas adjacent to the new apartment blocks. Ten trial pits were excavated within the landscaping, the locations of the trial pits are included on the enclosed drawing.

The following clean cover makeup was encountered:

- Trial Pit 1: 150mm of Topsoil onto at least 450mm of subsoil.
- Trial Pit 2: 200mm of Topsoil onto at least 450mm of subsoil.
- Trial Pit 3: 150mm of Topsoil onto at least 450mm of subsoil.
- Trial Pit 4: 500mm of Topsoil onto at least 150mm of clay subsoil.
- Trial Pit 5: 450mm of Topsoil onto at least 100m of clay subsoil.
- Trial Pit 6: 600mm of Topsoil onto clay subsoil.
- Trial Pit 7: 600mm of Topsoil onto clay subsoil.
- Trial Pit 8: 600mm of Topsoil onto clay subsoil.
- Trial Pit 9: 600mm of Topsoil onto clay subsoil.
- Trial Pit 10: 600mm of Topsoil onto clay subsoil.

Tel: (0191) 378 3151 • www.dunelm.co.uk • E-mail: enquiries@dunelm.co.uk • Company Registration Number 5048973

Topsoil was predominantly described as brown clayey slightly gravelly sand (topsoil). gravel was subangular to subrounded fine coarse of sandstone, mudstone and coal.

Clay subsoil was generally described as firm light brown slightly sandy slightly gravelly clay. Gravel is subangular to subrounded fine to coarse of sandstone, mudstone and coal.

Samples of imported topsoil were taken and sent for subsequent chemical analysis at an accredited laboratory. The results (reference 15-51272) are summarised below (the full results certificate is enclosed for reference). The topsoil was noted to be generally free from debris.

The results have been compared to the relevant generic assessment criteria for a residential end use from Atkins ATRISK Database, the GAC for lead has been taken from DEFRA C4SL.

Inorganic Test Results Topsoil

Contaminant	Units	No. of topsoil samples tested	No. of samples exceeding GAC	Generic Assessment Criteria mg/kg	Max concentration Above GAC mg/kg
pH	-	6	0	pH <5	-
Arsenic	mg/kg	6	0	32	-
Cadmium	mg/kg	6	0	10	-
Chromium (Total)	mg/kg	6	0	14.2	-
Lead	mg/kg	6	0	200	-
Mercury	mg/kg	6	0	170	-
Nickel	mg/kg	6	0	130	-
Selenium	mg/kg	6	0	350	-
Copper (GAC from MAFF)	mg/kg	6	0	135	-
Zinc (GAC from MAFF)	mg/kg	6	0	200	-
Asbestos	-	6	0	Present	None detected.

Values from LQM guidance S4UL's for residential with plant uptake enduse for a 1% SOM

*Value for lead has been withdrawn, value is based on C4SL by DEFRA.

No significantly elevated concentrations of inorganic contaminants were recorded within the samples of topsoil tested.

An assessment of selected PAH compounds is shown in the following table together with Generic Assessment Criteria (GAC) from the LQM S4ULs.

Summary of Results for Polynuclear Aromatic Hydrocarbons

Contaminant	Generic Assessment Criteria (mg/kg)	No. of samples tested	No. of samples with value greater than GAC	Max Concentration Above GAC mg/kg
	Resi with plant uptake			
Acenaphthene	210	6	0	-
Anthracene	2400	6	0	-
Benz(a)anthracene	7.2	6	0	-
Benzo(a)pyrene	2.2	6	0	-
Benzo(b)fluoranthene	2.6	6	0	-
Benzo(g,h,i)perylene	320	6	0	-

Tel: (0191) 378 3151 • www.dunelm.co.uk • E-mail: enquiries@dunelm.co.uk • Company Registration Number 5048973



OHS 623618



FS586808



EMS 586809



FINALIST



FINALIST

Benzo(k)fluoranthene	77	6	0	-
Chrysene	15	6	0	-
Dibenz(a,h)anthracene	0.24	6	0	-
Fluoranthene	280	6	0	-
Fluorene	170	6	0	-
Indeno(1,2,3,-cd)pyrene	27	6	0	-
Napthalene	2.3	6	0	-
Pyrene	620	6	0	-

*Values from LQM guidance S4UL's for residential with plant uptake enduse for a 1% SOM

No significantly elevated concentrations of PAH contaminants were recorded within the samples tested.

Asbestos was not detected in the samples tested.

In view of the above, Dunelm considered that the requirements set out in Dunelm's Remediation Strategy referenced above have been suitably undertaken within the landscaped areas of the apartment blocks.


We trust that the above is sufficient for your present needs however, please do not hesitate to get in touch should you require any further information.

Yours sincerely,

James Nairn
On behalf of Dunelm Geotechnical and Environmental Ltd

Tel: (0191) 378 3151 • www.dunelm.co.uk • E-mail: enquiries@dunelm.co.uk • Company Registration Number 5048973



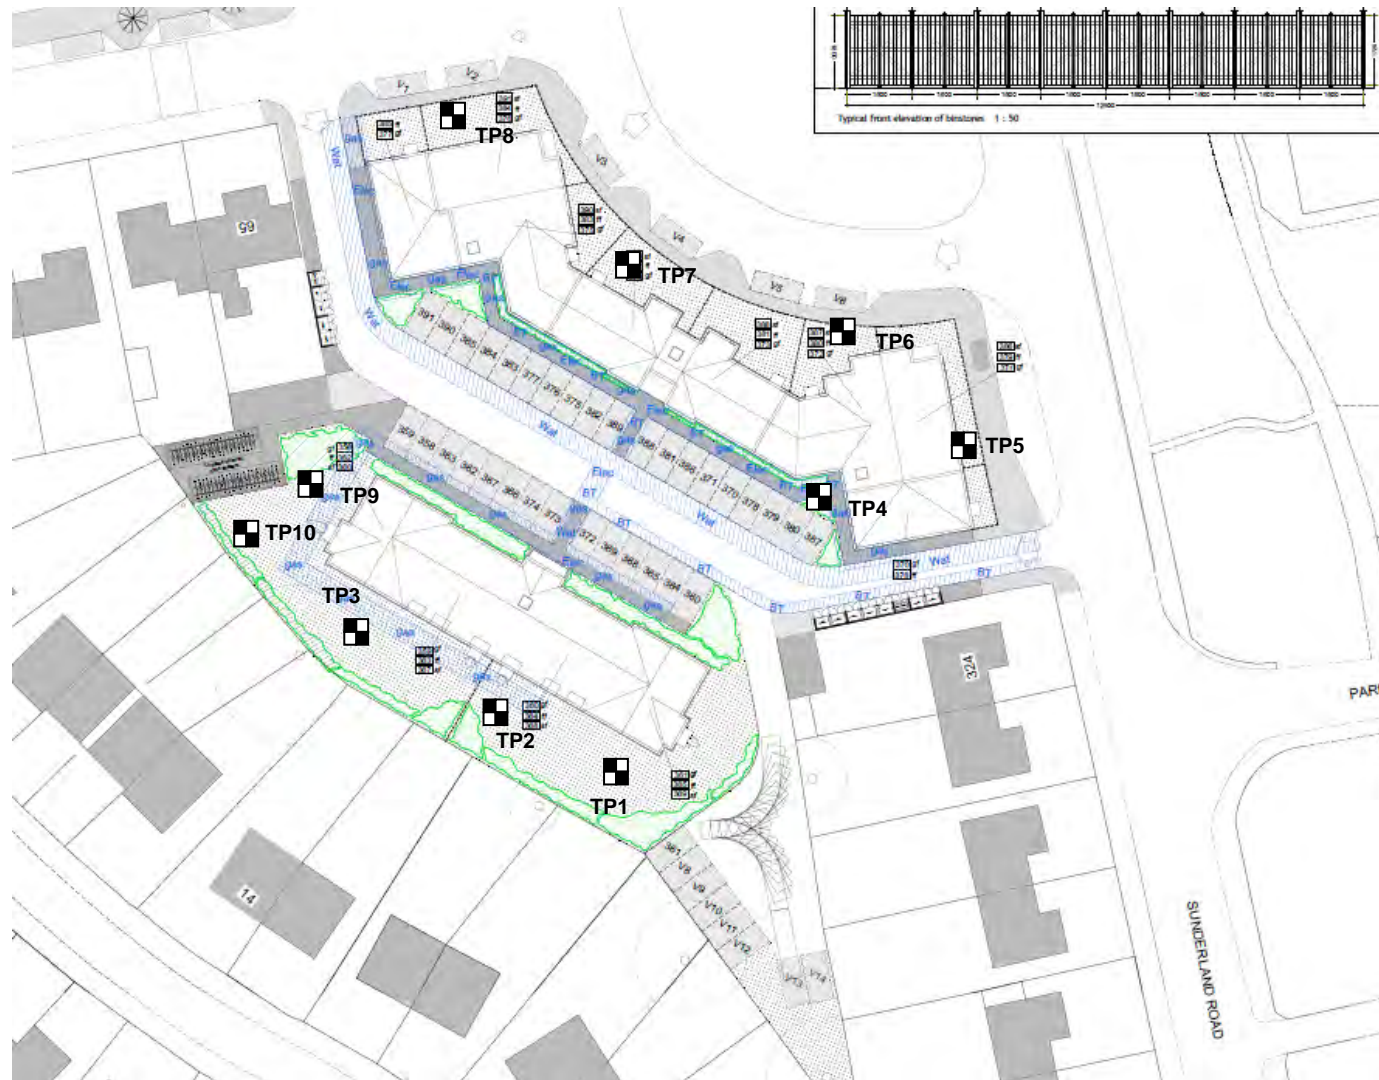

Contract:
Bellway, Cleadon

Drawing Title:
Validation Trial Pit Location Plan

Drawing No:
D3817-02

Date:
October 2016

Scale:
NTS

Drawn by:
JN



Certificate of Analysis

Certificate Number 15-51272

30-Nov-15

Client Dunelm Geotechnical & Environmental Ltd
Foundation House
St. John's Road
Meadowfield
Durham
DH7 8TZ

Our Reference 15-51272

Client Reference D3817

Order No 7145jnd3817

Contract Title Cleadon

Description 6 Soil samples.

Date Received 24-Nov-15

Date Started 24-Nov-15

Date Completed 30-Nov-15

Test Procedures Identified by prefix DETSn (details on request).

Notes Opinions and interpretations are outside the scope of UKAS accreditation. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. Observations and interpretations are outside the scope of ISO 17025. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved By

A handwritten signature in black ink, appearing to read "Rob Brown".

Rob Brown
Business Manager



Summary of Chemical Analysis

Soil Samples

Our Ref 15-51272
 Client Ref D3817
 Contract Title Cleadon

Lab No	904429	904430	904431	904432	904433	904434
Sample ID	SP1	SP2	SP3	SP4	SP5	SP6
Depth						
Other ID						
Sample Type	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
Sampling Date	20/11/15	20/11/15	20/11/15	20/11/15	20/11/15	20/11/15
Sampling Time	n/s	n/s	n/s	n/s	n/s	n/s

Test	Method	LOD	Units						
Metals									
Arsenic	DETSC 2301#	0.2	mg/kg	15	13	16	19	17	18
Cadmium	DETSC 2301#	0.1	mg/kg	0.7	0.9	1.0	0.9	0.8	0.8
Chromium	DETSC 2301#	0.15	mg/kg	36	40	36	37	33	29
Hexavalent Chromium	DETSC 2204*	1	mg/kg	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Copper	DETSC 2301#	0.2	mg/kg	41	37	46	53	46	49
Lead	DETSC 2301#	0.3	mg/kg	75	67	82	87	81	86
Mercury	DETSC 2325#	0.05	mg/kg	0.13	0.13	< 0.05	0.14	0.14	0.17
Nickel	DETSC 2301#	1	mg/kg	28	30	32	37	30	31
Selenium	DETSC 2301#	0.5	mg/kg	< 0.5	1.1	0.5	< 0.5	< 0.5	< 0.5
Zinc	DETSC 2301#	1	mg/kg	150	190	220	200	190	200
Inorganics									
pH	DETSC 2008#			7.7	7.4	7.4	7.7	7.7	7.7
Organic matter	DETSC 2002#	0.1	%	4.9	6.2	6.5	6.1	5.6	7.1
Sulphate Aqueous Extract as SO4	DETSC 2076#	10	mg/l	52	64	95	72	72	78
PAHs									
Naphthalene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acenaphthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Fluorene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Phenanthrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	0.3	< 0.1	< 0.1	< 0.1	< 0.1
Pyrene	DETSC 3301	0.1	mg/kg	< 0.1	0.3	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(a)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Chrysene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(b)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(k)fluoranthene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(a)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Indeno(1,2,3-c,d)pyrene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Dibenzo(a,h)anthracene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Benzo(g,h,i)perylene	DETSC 3301	0.1	mg/kg	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
PAH	DETSC 3301	1.6	mg/kg	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6	< 1.6

Summary of Asbestos Analysis

Soil Samples

Our Ref 15-51272

Client Ref D3817

Contract Title Cleadon

Lab No	Sample ID	Material Type	Result	Comment*	Analyst
904429	SP1	SOIL	NAD	none	Colin Patrick
904430	SP2	SOIL	NAD	none	Colin Patrick
904431	SP3	SOIL	NAD	none	Colin Patrick
904432	SP4	SOIL	NAD	none	Colin Patrick
904433	SP5	SOIL	NAD	none	Colin Patrick
904434	SP6	SOIL	NAD	none	Colin Patrick

Crocidolite = Blue Asbestos, Amosite = Brown Asbestos, Chrysotile = White Asbestos. Anthophyllite, Actinolite and Tremolite are other forms of Asbestos. Samples are analysed by DETSC 1101 using polarised light microscopy in accordance with HSG248 and documented in-house methods. NAD = No Asbestos Detected. Where a sample is NAD, the result is based on analysis of at least 2 sub-samples and should be taken to mean 'no asbestos detected in sample'. Key: * - not included in laboratory scope of accreditation.

Information in Support of the Analytical Results

Our Ref 15-51272
Client Ref D3817
Contract Cleadon

Containers Received & Deviating Samples

Lab No	Sample ID	Date Sampled	Containers Received	Holding time exceeded for tests	Inappropriate container for tests
904429	SP1 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		
904430	SP2 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		
904431	SP3 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		
904432	SP4 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		
904433	SP5 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		
904434	SP6 SOIL	20/11/15	GJ 250ml x2, GV, PT 1L		

Key: G-Glass P-Plastic J-Jar V-Vial T-Tub

DETS cannot be held responsible for the integrity of samples received whereby the laboratory did not undertake the sampling. In this instance samples received may be deviating. Deviating Sample criteria are based on British and International standards and laboratory trials in conjunction with the UKAS note 'Guidance on Deviating Samples'. All samples received are listed above. However, those samples that have additional comments in relation to hold time and/or inappropriate containers are deviating due to the reasons stated. This means that the analysis is accredited where applicable, but results may be compromised due to sample deviations. If no sampled date (soils) or date+time (waters) has been supplied then samples are deviating. However, if you are able to supply a sampled date (and time for waters) this will prevent samples being reported as deviating where specific hold times are not exceeded and where the container supplied is suitable.

Soil Analysis Notes

Inorganic soil analysis was carried out on a dried sample, crushed to pass a 425µm sieve, in accordance with BS1377.

Organic soil analysis was carried out on an 'as received' sample. Organics results are corrected for moisture and expressed on a dry weight basis.

The Loss on Drying, used to express organics analysis on an air dried basis, is carried out at a temperature of 28°C +/-2°C.

Disposal

From the issue date of this test certificate, samples will be held for the following times prior to disposal :-


Soils - 1 month, Liquids - 2 weeks, Asbestos (test portion) - 6 months



Photograph 1: Validation Pit 1



Photograph 2: Validation Pit 1
ite


 TEL: 0191 378 3151 FAX: 0191 378 3157	Contract: Cleadon Phase 4 & 5		Contract No: D3817	
	Client: Bellway Homes			
	Validation Photographs		26/07/2016	Sheet 1 of 15



Photograph 3: Validation Pit 1



Photograph 4: Validation Pit 2


	Contract: Cleadon Phase 4 & 5		Contract No: D3817	
	Client: Bellway Homes			
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs		26/07/2016	Sheet 2 of 15



Photograph 5: Validation Pit 2



Photograph 6: Validation Pit 2


	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs	26/07/2016	Sheet 3 of 15



Photograph 7: Validation Pit 2



Photograph 8: Validation Pit 3


 <p>TEL: 0191 378 3151 FAX: 0191 378 3157</p>	<p>Contract: Cleadon Phase 4 & 5</p>	<p>Contract No: D3817</p>
	<p>Client: Bellway Homes</p>	
	<p>Validation Photographs</p>	<p>26/07/2016</p>



Photograph 9: Validation Pit 3



Photograph 10: Validation Pit 3


	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs	26/07/2016	Sheet 5 of 15



Photograph 11: Validation Pit 3



Photograph 12: View of Site


	Contract: Cleadon Phase 4 & 5		Contract No: D3817	
	Client: Bellway Homes			
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs		26/07/2016	Sheet 6 of 15



Photograph 13: Validation Pit 4



Photograph 14: View of Site


	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs	27.10.2016	Sheet 7 of 15



Photograph 11: Validation Pit 5



Photograph 12: View of Area


	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
TEL: 0191 378 3151 FAX: 0191 378 3157	Validation Photographs	27.10.2016	Sheet 8 of 15



Photograph 11: Validation Pit 6




Photograph 12: View of Area

 TEL: 0191 378 3151 FAX: 0191 378 3157	Contract: Cleadon Phase 4 & 5	Contract No: D3817
	Client: Bellway Homes	
	Validation Photographs	27.10.2016



Photograph 11: Validation Pit 7


 TEL: 0191 378 3151 FAX: 0191 378 3157	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
	Validation Photographs	27.10.2016	Sheet 10 of 15



Photograph 11: Validation Pit 8



Photograph 12: View of Area


 <p>TEL: 0191 378 3151 FAX: 0191 378 3157</p>	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
	Validation Photographs	27.10.2016	Sheet 11 of 15



Photograph 11: Validation Pit 9



Photograph 12: View of Area

 <p>TEL: 0191 378 3151 FAX: 0191 378 3157</p>	Contract: Cleadon Phase 4 & 5		Contract No: D3817
	Client: Bellway Homes		
	Validation Photographs	27.10.2016	Sheet 12 of 15



Photograph 11: Validation Pit 10



TEL: 0191 378 3151
FAX: 0191 378 3157

Contract:
Cleadon Phase 4 & 5

Contract No:
D3817

Client:
Bellway Homes

Validation Photographs

27.10.2016

Sheet 15 of 15