




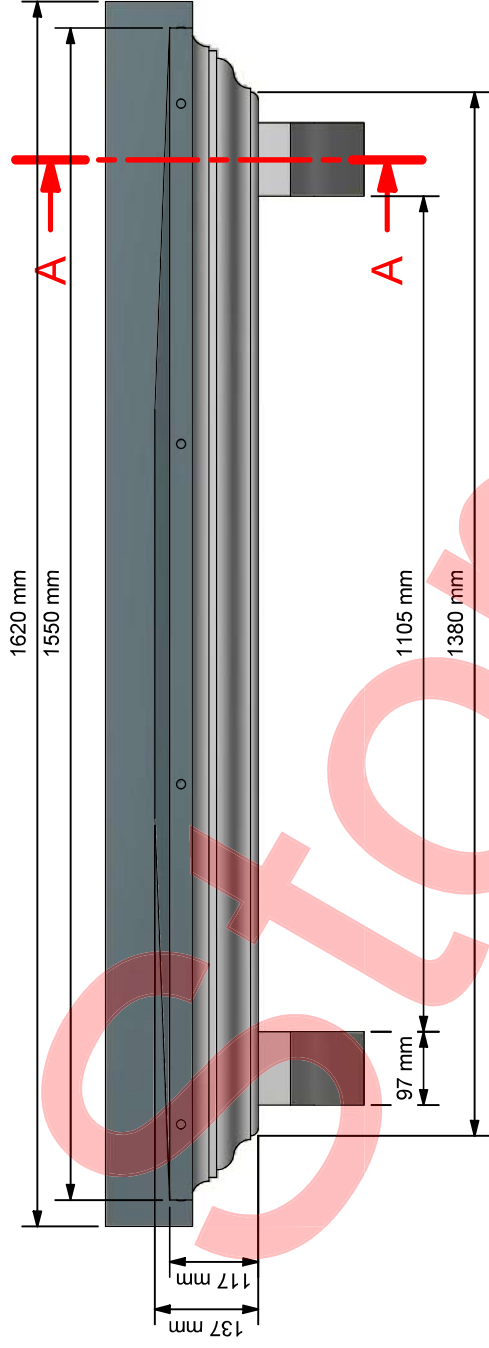

Front View (1:10)

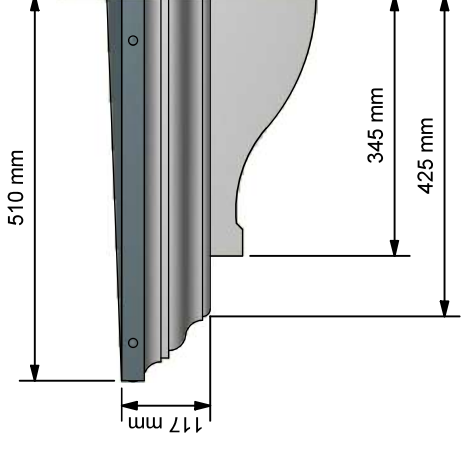

Side View (1:10)

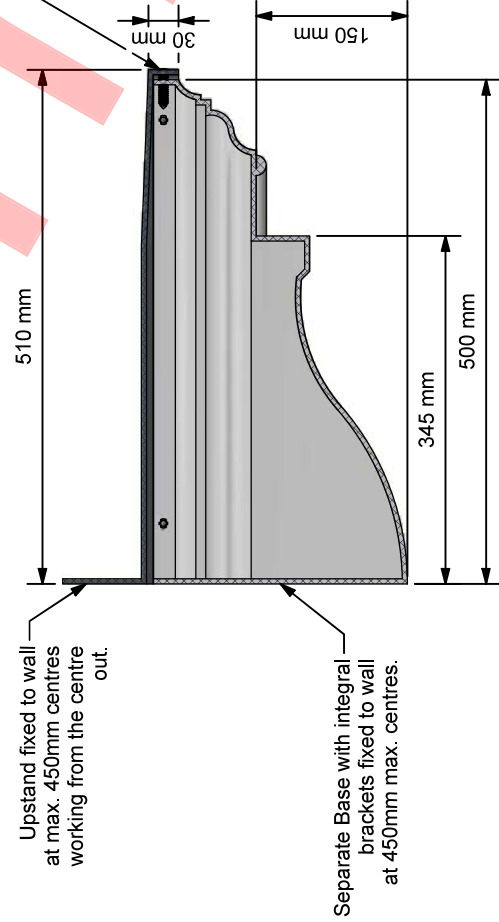


A-A (1:7.5)

GRP roof supplied separately to be fixed to base on site using fir tree fixings supplied loose by Stormking at 300mm max. centres working from the centre out and maintaining the fall to the front.

Upstand fixed to wall at max. 450mm centres working from the centre out.

Separate Base with integral brackets fixed to wall at 450mm max. centres.

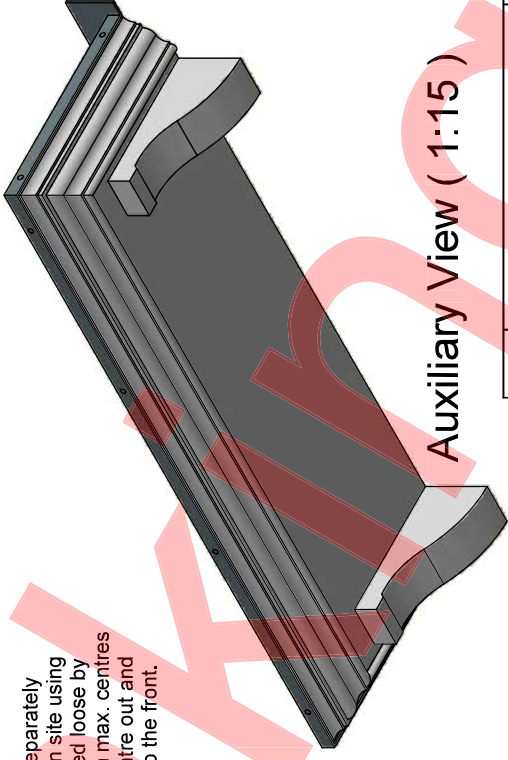

Auxiliary View (1:15)

B.2	Installation Guidance Added	18/10/2021	P O
B.1	1st Production Issue	24/06/2015	P O
B	1st Vault Issue	24/06/2015	P O
A	Brackets Now Part Of Mould 21.05.04	24/06/2015	P O
REV	DESCRIPTION	DATE	AUTHOR

REVISION HISTORY

Approved	Date	Drawing Number	9423
DP	24/06/2015	Manuf. App	18/10/2021
Manuf. App	DP	Manuf. App	18/10/2021
Sheet	1	Of	1
Revision	B.2	Of	1

Designed by	Date	Manufacture Notes
P O	24/06/2015	
Scale	Checked	DP



Amington Point, Sandy Way, Amington Ind. Est.
TAWWORTH, Staffordshire, B77 4ED

Description
1550 x 510mm Leven Style
Door Canopy