CAD 21 Ltd
Unit 12, Berrymoor Court,
Northumberland Business Park
Newcastle upon Tyne
NE23 7RZ
Tel: 0191 250 2211

South Tyneside NHS
NHS Foundation Trust

South Shields General Hospital – New Energy Centre

PLANNING SUBMISSION – Chimney Height

Rev C1

24th July 2018

1.0 INTRODUCTION

This document has been produced in collaboration with Malones to assist with gaining approval of the proposed Chimney height which forms a planning requirement for the new Energy Centre currently being built on the grounds of South Tyneside General Hospital.

The Chimney height requires approval from an Environmental Health Officer (EHO) before an order can be placed and as such this element is time sensitive to the project.

The pre-fabricated multi-core Chimney comprises; external windshield, 6No. individual flue liners, Y-spar ladder with fall arrest system, 2No. internal platforms for inspection of the flue liners and windshield, internal LED lighting, lightning protection earth bosses and external steeple jack access bosses at 1.5m intervals up the full height of the chimney.

Each internal flue liner is also provided with a clean out door.

The windshield (the outer sheath of the chimney) is to be shot blasted to a RAL 7035 (grey) with the top 2 meters to be finished in an acid resistant black resin.

2.0 METHODOLOGY

The chimney height has been based on D1 calculation.

The nearest building is Ward 17 and it is 15meter high.

The thermal plant comprises;

- 4MW LTHW Boiler – dual fuel
- 4MW LTHW Boiler – dual fuel
- 7 tonne Steam Boiler – dual fuel
- 3.5 tonne Steam Boiler – dual fuel
- 3.5 tonne Steam Boiler – dual fuel
- 532kWe Combined Heat and Power Unit – gas only

All boilers are dual fuel, capable of burning either natural gas or 35 second gas oil; therefore, 2 scenarios have been evaluated;

- Normal operation – all duty/priming* gas fired plant in operation
- Back-up operation – all duty/priming* fuel oil fired plant in operation

*The 7tonne steam boiler provides resilience to both the LTHW (by means of a steam to LTHW plate heat exchanger) and Steam Systems i.e. this boiler is only active if one other boiler is down for maintenance; therefore, the worst case is if one of the 3.5tonne steam boilers is down for maintenance. For clarity see table below for details;

PLANT	NATURAL GAS SCENARIO	FUEL OIL SCENARIO	COMMENT
4MW LTHW Boiler	On	On	-
4MW LTHW Boiler	On	On	-
7 tonne Steam Boiler	On	On	Providing the back up to the 3.5tonne steam boiler
3.5 tonne Steam Boiler	On	On	-
3.5 tonne Steam Boiler	Off	Off	Down for maintenance
532kWe CHP Unit	On	Off	Gas only

3.0 RESULTS

The D1 calculation provided the following results;

Scenario 1 Natural Gas: 17meters
Scenario 2 Fuel Oil: 20 meters

Refer to the appendix for the detailed calculations including supporting evidence and Chimney drawings.

4.0 CONCLUSION

To protect against any event the current proposal shall be based on scenario 2 i.e. Chimney height of 20 meters.

To guarantee the performance and payback of the Combined Heating and Power Unit the thermal plant shall be run on natural gas whenever possible. The back-up fuel source, 35 second gas oil, will only be used in an emergency during a gas outage.

5.0 APPENDIX

- D1 calculation Natural Gas
- D1 calculation Fuel Oil
- STGH DM4000LN data – LTHW Boiler performance data
- STGH YSXALN7000IE data – 7tonne Steam Boiler performance data
- STGH YSXALN3500IE data – 3.5tonne Steam Boiler performance data
- E530M (250NOx) Technical Datasheet – CHP performance data
- Flue Fabrication Drawing
- Flue Design Drawing

Exhaust Discharge Height Calculation To D1

Project:- **STDH Energy Centre**
Customer:-
Engineer:-
Cal.Ref.:- **Gas Blrs - Scenario 1**
Quote.Ref.:-
Date.:- **20/07/2018** **Page 1**

Jeremias UK Ltd, Unit 2-4 Long Stoop Way
Crown Farm Industrial Estate, Mansfield
Nottinghamshire, NG19 0FQ
Tel:01623 8899219 Fax:423733
sales@jeremias-fluesystems.co.uk
www.jeremias-fluesystems.co.uk

Exhaust Ref.:-	**1**	**2**	**3**	**4**	**5**	**6**
Input Details:-						
Appliance Type.	CHP	Boiler	Boiler	Boiler	Boiler	Boiler
Make.	CHP	Byworth	Byworth	Byworth	Byworth	Byworth
Model.		DM4000LN	DM4000LN	YSXALN7000I	YSXALN3500I	YSXALN3500I
Fuel Type.	N.Gas	N.Gas	N.Gas	N.Gas	N.Gas	N.Gas
Fuel Su%.	0.0	0.0	0.0	0.0	0.0	0.0
Exh.Gas Flow.	2924.0	7668.0	7668.0	7776.0	3960.0	3960.0
Exh.Gas Units.	kg/hr	m3/hr	m3/hr	m3/hr	m3/hr	m3/hr
Exh.Gas Temp(in).(C)	120	154	154	122	129	129
Exh.Gas Temp(exit).(C)	110	141	141	110	110	110
Exh.Exit Dia.(mm)	300	550	500	700	600	600
Exh.Gas Emm. NO	225	95	95	95	95	95
Exh.NO Units	mg/Nm3(dry) @5%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2
Exh.Gas Emm. NO2	25	5	5	5	5	5
Exh.NO2 Units	mg/Nm3(dry) @5%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2
Exh.Gas %H2O	11.0	16.0	16.0	16.0	16.0	16.0
Exh.Gas %O2	10.0	4.0	4.0	4.0	4.0	4.0
Appliance Input	1512.0	4761.0	4761.0	5141.0	2580.0	2580.0
App.Input Units	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)

Location:- Major city center / Heavy industrial area.

	SO2	NO	NO2	CO	SPM
Guideline Con.s(mg/m3)	0.44	1.0	0.2	57.0	0.3
Background Con.s(mg/m3)	0.16	0.4	0.17		0.4

Exhaust Discharge Height Calculation To D1

jeremias CHIMNEY SYSTEMS

Jeremias UK Ltd, Unit 2-4 Long Stoop Way
Crown Farm Industrial Estate, Mansfield
Nottinghamshire, NG19 0FQ
Tel:01623 8899219 Fax:423733
sales@jeremias-fluesystems.co.uk
www.jeremias-fluesystems.co.uk

Project:- **STDH Energy Centre**
Customer:-
Engineer:-
Cal.Ref.:- **Gas Blrs - Scenario 1**
Quote.Ref.:-
Date.:- **20/07/2018** **Page 1**

Exhaust Ref.:-	**1**	**2**	**3**	**4**	**5**	**6**
Results:-						
Appliance Status	ON	ON	ON	ON	ON	OFF
Exh.Gas Vol. @ Exit(M3/s)	0.93	2.07	2.07	2.09	1.05	0.0
Exh.Gas Vel. @ Exit(m/s)	13.16	8.69	10.52	5.44	3.71	0.0
Exh.Gas Emm. NO(g/s)	0.091	0.1026	0.1026	0.1125	0.0563	0.0
Exh.Gas Emm. NO2(g/s)	0.0101	0.0054	0.0054	0.0059	0.003	0.0
Exh.Gas Emm. CO(g/s)	0.3034	0.0676	0.0406	0.0445	0.0371	0.0
Pollution Index NO	152	171	171	187	94	
Pollution Index NO2	337	180	180	197	99	
Pollution Index CO	5	1	1	1	1	
Heat Release Q(MW)	0.08	0.23	0.23	0.19	0.09	0.0
Exit Momentum M(m^4/s)	9.04	12.27	14.85	8.42	2.87	0.0
Um(m)	2.33	1.83	1.94	1.62	1.43	0.0
Um/2(m)	1.17	0.91	0.97	0.81	0.72	0.0
5Um(m)	11.65	9.15	9.72	8.11	7.17	0.0
Method of Calculation	Single Source					
Pollution Index	993					
Total Q(MW)	0.82					
Total M(m^4/s)	47.45					
Ub(m)	2.37					
Um(m)	2.82					
5Um(m)	14.1					
No of Buildings	1					
No. 1Height / Width	15.0x >Ht					
Hm	15.0					
Tm						
Calculated Height C(m)	17.0					
Adj.for Min. Requirements(m)	0.0					
Final Discharge Height(m)	**17.0**					
(Above ground level.)						

Comments:

1. The final chimney height of all chimneys must be approved by the Local Environmental Health Department who may specify a further adjustment in overall height in light of particular local circumstances.

Exhaust Discharge Height Calculation To D1

Jeremias UK Ltd, Unit 2-4 Long Stoop Way
Crown Farm Industrial Estate, Mansfield
Nottinghamshire, NG19 0FQ
Tel:01623 8899219 Fax:423733
sales@jeremias-fluesystems.co.uk
www.jeremias-fluesystems.co.uk

Project:- **STDH Energy Centre**
Customer:-
Engineer:-
Cal.Ref.:- **Oil Blrs Scenario 2_1**
Quote.Ref.:-
Date.:- **20/07/2018**

Exhaust Ref.:-	**1**	**2**	**3**	**4**	**5**	**6**
Input Details:-						
Appliance Type.	CHP	Boiler	Boiler	Boiler	Boiler	Boiler
Make.	CHP	Byworth	Byworth	Byworth	Byworth	Byworth
Model.		DM4000LN	DM4000LN	YSXALN7000I	YSXALN3500I	YSXALN3500I
Fuel Type.	N.Gas	Gas Oil	Gas Oil	Gas Oil	Gas Oil	Gas Oil
Fuel Su%.	0.0	0.1	0.1	0.1	0.1	0.1
Exh.Gas Flow.	2924.0	4979.0	4979.0	7776.0	3960.0	3960.0
Exh.Gas Units.	kg/hr	Nm3/hr	Nm3/hr	m3/hr	m3/hr	m3/hr
Exh.Gas Temp(in).(C)	120	148	148	121	127	127
Exh.Gas Temp(exit).(C)	110	141	141	110	110	110
Exh.Exit Dia.(mm)	300	550	550	700	600	600
Exh.Gas Emm. NO	225	190	190	190	190	190
Exh.NO Units	mg/Nm3(dry) @5%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2
Exh.Gas Emm. NO2	25	10	10	10	10	10
Exh.NO2 Units	mg/Nm3(dry) @5%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2	mg/Nm3(dry) @3%O2
Exh.Gas %H2O	11.0	10.0	10.0	10.0	10.0	10.0
Exh.Gas %O2	10.0	5.0	5.0	5.0	5.0	5.0
Appliance Input	1512.0	4558.0	4558.0	4931.0	2473.0	2473.0
App.Input Units	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)	kw(gross.Cv)

Location:- Major city center / Heavy industrial area.

	SO2	NO	NO2	CO	SPM
Guideline Con.s(mg/m3)	0.44	1.0	0.2	57.0	0.3
Background Con.s(mg/m3)	0.16	0.4	0.17		0.4

Exhaust Discharge Height Calculation To D1

Project:- **STDH Energy Centre**
Customer:-
Engineer:-
Cal.Ref.:- **Oil Blrs Scenario 2_1**
Quote.Ref.:-
Date.:- **20/07/2018** **Page 1**

Jeremias UK Ltd, Unit 2-4 Long Stoop Way
Crown Farm Industrial Estate, Mansfield
Nottinghamshire, NG19 0FQ
Tel:01623 8899219 Fax:423733
sales@jeremias-fluesystems.co.uk
www.jeremias-fluesystems.co.uk

Exhaust Ref.:-	**1**	**2**	**3**	**4**	**5**	**6**
Results:-						
Appliance Status	OFF	ON	ON	ON	ON	OFF
Exh.Gas Vol. @ Exit(M3/s)	0.0	2.1	2.1	2.1	1.05	0.0
Exh.Gas Vel. @ Exit(m/s)	0.0	8.83	8.83	5.46	3.73	0.0
Exh.Gas Emm. SO2(g/s)	0.0	0.1999	0.1999	0.2163	0.1085	0.0
Exh.Gas Emm. NO(g/s)	0.0	0.2101	0.2101	0.2273	0.114	0.0
Exh.Gas Emm. NO2(g/s)	0.0	0.0111	0.0111	0.012	0.006	0.0
Exh.Gas Emm. CO(g/s)	0.0	0.0692	0.0692	0.0749	0.0376	0.0
Exh.Gas Emm. g/s)	0.0	0.0	0.0	0.0	0.0	0.0
Pollution Index SO2		714	714	772	387	
Pollution Index NO		350	350	379	190	
Pollution Index NO2		369	369	399	200	
Pollution Index CO		1	1	1	1	
Heat Release Q(MW)	0.0	0.23	0.23	0.19	0.09	0.0
Exit Momentum M(m^4/s)	0.0	12.66	12.66	8.46	2.9	0.0
Um(m)	0.0	3.73	3.73	4.7	4.16	0.0
Um/2(m)	0.0	1.87	1.87	2.35	2.08	0.0
5Um(m)	0.0	18.66	18.66	23.51	20.78	0.0
Method of Calculation	Single Source					
Pollution Index	2588					
Total Q(MW)	0.74					
Total M(m^4/s)	36.68					
Ub(m)	3.84					
Um(m)	6.75					
5Um(m)	33.73					
No of Buildings	1					
No. 1Height / Width	15.0x >Ht					
Hm	15.0					
Tm						
Calculated Height C(m)	20.02					
Adj.for Min. Requirements(m)	0.0					
Final Discharge Height(m)	**20.0**					
(Above ground level.)						

Comments:

1. The final chimney height of all chimneys must be approved by the Local Environmental Health Department who may specify a further adjustment in overall height in light of particular local circumstances.

DALESMAN HOT WATER MODEL	DM	4000	LT	LN
REQUIRED BOILER MAXIMUM OUTPUT	kW	4000		
WATER FLOW TEMPERATURE FROM BOILER	DegC	95		
WATER RETURN TEMPERATURE INTO BOILER	DegC	75		
Water Flow Rate Through Boiler	kg/hr	171983		
	L/sec	47.77		
Standard Flow and Return Connection Size	mm	150		
Customer Connection Sizes if Different	mm	150		
Boiler Operating Pressure barg	3	43.5	psig	
Ambient Air Temp degC	21			

FUEL HEATING VALUES

GASEOUS FUEL

NATURAL GAS

GCV	52.97 *Mj/kg*	40.55 MJ/Ncu mtre
NCV	47.75 *Mj/kg*	36.55 MJ/Ncu mtre

LIQUID FUEL

CLASS A2 AND D -FUEL OIL

GCV	46.89 *Mj/kg*	40.22 Mj/litre
NCV	43.98 *Mj/kg*	37.73 Mj/litre

BOILER PERFORMANCE		CLASS A2 AND D -FUEL OIL					NATURAL GAS					
Load	%	100	75	50	25	20	100	75	50	25	15	
	kw	4000	3000	2000	1000	800	4000	3000	2000	1000	600	
Nett Furnace Heat Release	mw/m^3	**1.237**	**0.927**	**0.618**	**0.311**	**0.250**	**1.246**	**0.933**	**0.622**	**0.313**	**0.190**	
Nett Heat Input	mw	**4.295**	**3.218**	**2.145**	**1.079**	**0.868**	**4.327**	**3.241**	**2.162**	**1.088**	**0.661**	
Gross Furnace Heat Release	mw/m3	**1.312**	**0.983**	**0.655**	**0.330**	**0.265**	**1.371**	**1.027**	**0.685**	**0.345**	**0.209**	
Front Smoke BoxTemperature	deg C	327	295	256	203	190	353	319	276	218	185	
Boiler Outlet Temperature	deg C	148	138	126	112	109	154	143	130	115	107	
		Exhaust Temp at or near Dew Point					Exhaust Temp at or near Dew Point					
Combustion Products	**CO2** %	12.50	12.00	11.50	11.00	10.50	10.30	9.80	9.20	8.50	8.30	
	O2 %	3.80	4.49	5.17	5.86	6.55	2.66	3.55	4.62	5.87	6.22	
Total Gas Weight	kg/h	6438	5004	3466	1814	1524	6338	4958	3493	1886	1170	
Max CO_2 Emissions	kg/hr	1100					862					
Boiler Efficiency on GCV	%	88.12	88.26	88.37	88.15	87.77	84.36	84.51	84.60	84.31	83.72	EN12953
Boiler Efficiency on NCV	%	93.90	94.04	94.15	94.00	93.59	93.50	93.66	93.75	93.52	92.84	EN12953
Total Draught Loss	inchwg	3.87	2.30	1.09	0.29	0.21	3.97	2.38	1.16	0.33	0.09	
	mbar	9.67	5.75	2.72	0.74	0.53	9.92	5.96	2.90	0.83	0.22	
Combustion air volume	Sm^3/s	1.379	1.074	0.746	0.391	0.329	1.363	1.068	0.755	0.409	0.254	
Exit Gas Volume from Boiler	Am^3/s	2.130	1.616	1.088	0.549	0.458	2.130	1.623	1.109	0.575	0.350	
	Nm^3/s	1.383	1.07475	0.7444	0.3897	0.327	1.361	1.065	0.750	0.405	0.251	
Fuel consumption	kg/h	349.93	262.20	174.77	87.89	70.76	323.56	242.42	161.66	81.38	49.44	kg/h
	litre/h	407.85	305.60	203.70	102.44	82.47	446.18	334.28	222.92	112.22	68.18	Sm^3/h
							422.75	316.73	211.21	106.32	64.60	Nm^3/h
kWhr	Gross	4557.5	3414.9	2276.3	1144.7	921.5	4760.5	3566.6	2378.4	1197.3	727.45	kWhr Gross
HydraulicPressure Drop across Boiler for Actual Connection Sizes	mbar	122	4.1	ft head								
Duct / chimney size @ velocity of 12 m/s and 15m/s		470	420	mm I/Dia								
Actual Chimney Connection Size		493		mm I/Dia								

Dalesman Boiler Performance Data

YORKSHIREMAN LOW NOX MODEL	YSLN	7000	IE

Boiler working pressure	barg	6.9	100.05	psig
Saturation Temperature	degC	169.9		
Ambient Air Temp	degC	21		

REQUIRED BOILER DUTY 7000						
	Percentage Load	%	100	75	50	25
	Heat Output	kw	4389.5	3292.1	2194.7	1097.4
	F&A 100DegC	kg/h	7000	5250	3500	1750
		lb/h	15435	11576	7717.5	3858.8
Actual Boiler Output with Feed Water		kg/hr	6550.3	4912.7	3275.1	1637.6
Temperature of 85	degC	lb/hr	14443	10833	7221.7	3610.8

FUEL HEATING VALUES

Natural Gas		
GCV	52.97 Mj/kg	40.5 MJ/Ncu mtre
NCV	47.75 Mj/kg	36.6 MJ/Ncu mtre
ClassA2 and D-Fuel Oil		
GCV	46.89 Mj/kg	
NCV	43.98 Mj/kg	

BOILER PERFORMANCE		ClassA2 and D-Fuel Oil				Natural Gas			
Percentage Load	%	100	75	50	25	100	75	50	25
Nett Heat Release	mw/m^3	**1.12**	**0.90**	**0.60**	**0.30**	**1.13**	**0.93**	**0.63**	**0.32**
Nett Heat Input	mw	**4.65**	**3.71**	**2.48**	**1.26**	**4.67**	**3.87**	**2.59**	**1.32**
Gross Heat Release Rate	mw/m^3	**1.19**				**1.24**			
Front Smoke BoxTemperature	deg C	310	287	259	224	327	301	271	233
Boiler Outlet Temperature	deg C	187	183	178	174	190	185	180	174
ECONOMISER FITTED TO BOILER ROWS 6		Exhaust Temp approaching Acid Dew Pnt							
Economiser Gas Outlet Temperature	degC	121	119	117	117	122	120	117	117
Econ Feed Water Outlet Temperature	degC	103	103	103	103	104	104	104	104
Economiser Duty	kW	148	111	74	36	148	111	74	36
Total Gas Weight	kg/h	6964	5433	3781	1995	6945	5374	3806	2072
Max CO_2 Emissions	kg/hr	1190				944			

Boiler Efficiency on GCV with Econ	%	90.79	90.64	90.31	89.46	88.03	87.91	87.59	86.81	EN12953
Boiler Efficiency on NCV with Econ	%	95.40	95.19	94.80	93.71	95.30	95.08	94.64	93.46	EN12953

Total Draught Loss	inchwg	5.91	3.35	1.62	0.46	6.02	3.45	1.72	0.51
	mbar	14.77	8.39	4.05	1.14	15.07	8.64	4.29	1.27
Combustion air volume	Sm^3/s	1.49	1.17	0.81	0.43	1.49	1.16	0.82	0.45
Exit Gas Volume from Economiser	Am^3/s	2.16	1.67	1.16	0.61	2.16	1.66	1.17	0.64

Fuel consumption									
	kg/h	378.51	284.65	190.64	96.63	349.33	262.77	176.13	89.44	kg/h
	litre/h	440.88	331.55	222.05	112.56	481.71	362.35	242.87	123.33	Sm^3/h
						456.41	343.32	230.12	116.85	Nm^3/h
	kWhr Gross	4930.8	3708.1	2483.5	1258.8	5140.7	3866.9	2591.9	1316.2	kWhr Gross

Steam Release Area	m^2	9.19	Duct / chimney size @ velocity of 12 m/s	mm	478	inside diameter
Steam Release Rate	m/sec	0.0482	Duct / chimney size @ velocity of 15 m/s	mm	428	inside diameter

Yorkshireman Boiler Performance Data

YORKSHIREMAN LOW NOX MODEL	YSLN	3500	IE

Boiler working pressure	barg	6.9	100.05	psig
Saturation Temperature	degC	169.9		
Ambient Air Temp	degC	21		

REQUIRED BOILER DUTY 3500						
	Percentage Load	%	100	75	50	25
	Heat Output	kw	2194.7	1646	1097.4	548.68
	F&A 100DegC	kg/h	3500	2625	1750	875
		lb/h	7717.5	5788.1	3858.8	1929.4
Actual Boiler Output with Feed Water Temperature of 85 degC		kg/hr	3275.1	2456.4	1637.6	818.8
		lb/hr	7221.7	5416.3	3610.8	1805.4

FUEL HEATING VALUES

Natural Gas			
GCV	52.97	Mj/kg	40.5 MJ/Ncu mtre
NCV	47.75	Mj/kg	36.6 MJ/Ncu mtre
ClassA2 and D-Fuel Oil			
GCV	46.89	Mj/kg	
NCV	43.98	Mj/kg	

BOILER PERFORMANCE		ClassA2 and D-Fuel Oil				Natural Gas			
Percentage Load	%	100	75	50	25	100	75	50	25
Nett Heat Release	mw/m^3	1.14	0.91	0.61	0.31	1.15	0.95	0.64	0.32
Nett Heat Input	mw	2.33	1.86	1.24	0.63	2.34	1.94	1.30	0.66
Gross Heat Release Rate	mw/m^3	1.21				1.27			
Front Smoke BoxTemperature	deg C	363	334	300	253	388	355	317	267
Boiler Outlet Temperature	deg C	206	198	189	179	210	201	192	181
ECONOMISER FITTED TO BOILER ROWS 6		Exhaust Temp approaching Acid Dew Pnt							
Economiser Gas Outlet Temperature	degC	127	124	121	120	129	125	121	120
Econ Feed Water Outlet Temperature	degC	107	106	106	104	108	107	106	105
Economiser Duty	kW	87	64	41	19	87	64	41	19
Total Gas Weight	kg/h	3493	2723	1894	999	3485	2695	1907	1038
Max CO_2 Emissions	kg/hr	597				474			
Boiler Efficiency on GCV with Econ	%	90.47	90.36	90.10	89.31	87.75	87.68	87.41	86.71 EN12953
Boiler Efficiency on NCV with Econ	%	95.00	94.83	94.50	93.45	94.85	94.69	94.31	93.19 EN12953

Total Draught Loss	inchwg	4.29	2.37	1.14	0.32	4.34	2.44	1.21	0.35	
	mbar	10.74	5.93	2.84	0.79	10.86	6.11	3.02	0.88	
Combustion air volume	Sm^3/s	0.75	0.58	0.41	0.22	0.75	0.58	0.41	0.22	
Exit Gas Volume from Economiser	Am^3/s	1.10	0.85	0.59	0.31	1.10	0.84	0.59	0.32	
Fuel consumption	kg/h	189.84	142.69	95.50	48.37	175.29	131.78	88.26	44.78	**kg/h**
	litre/h	221.12	166.20	111.24	56.34	241.72	181.72	121.71	61.75	Sm^3/h
						229.02	172.18	115.32	58.51	Nm^3/h
	kWhr Gross	2473.0	1858.8	1244.1	630.1	2579.5	1939.3	1298.9	659.0	kWhr Gross

Steam Release Area	m^2	5.58	Duct / chimney size @ velocity of 12 m/s	mm	342	inside diameter
Steam Release Rate	m/sec	0.0397	Duct / chimney size @ velocity of 15 m/s	mm	306	inside diameter

Yorkshireman Boiler Performance Data

Technical Datasheet

E530M 250NOx Natural Gas CHP Unit

Energy Balance and Load Data at Power Factor 1		Units	100%	75%***	50%***
Electrical Output	(+/-3%)	kW	520	390	260
Electrical Efficiency (Net)	(+/-5%)	%	38.0%	37.3%	35.9%
Heat Output	(+/-10%)	kW	687	534	374
Thermal Efficiency (Net)	(+/-8%)	%	50.3%	51.1%	51.7%
Fuel Input (Net / Gross)*	(+/-5%)	kW	1367 / 1512	1045 / 1156	724 / 801
Total Efficiency (Net)	(+/-8%)	%	88.3%	88.4%	87.6%
Heat Output from Jacket Water	(+/-7%)	kW	358	267	181
Heat Output from Exhaust Gas @ Outlet Temp.	(+/-7%)	kW	329	267	193
Aftercooler Heat Output	(+/-7%)	kW	38	29	19
Radiated Heat Output	(+/-7%)	kW	55	32	20
Combustion Air Flow (30 °C, 100 kPa, 30% RH)**	(+/-5%)	m^3/h	2426	1833	1239
Fuel Mass Flow (ρ = 0.75kg/Nm³)	(+/-5%)	kg/h	102.5	78.4	54.3
Fuel Volume Flow (LHV = 10kWh/Nm³)	(+/-5%)	Nm3/h	136.7	104.5	72.4
Exhaust Mass Flow (Wet)	(+/-5%)	kg/h	2924	2210	1495
Exhaust Volume Flow @ Outlet Temp.	(+/-5%)	m^3/h	3257	2461	1665

*Natural gas Net and Gross fuel input figures are based on 36MJ/Nm3 and 39.8MJ/Nm3 respectively. The Gross figure is used when establishing UK fuel costs. Net figures are provided for ease of performance comparison with other technologies. Fuel must comply with engine manufacturer's fuel quality guide, supplied seperately.

**Engine technical data is based on Standard Conditions according to DIN ISO 3046-1 but engine de-rate applies when Combustion Air Temperature is >25°C.

*** If operating at part load for long periods of time, the unit should be run at full load for at least 5 hours in a given 24 hour period.

Engine Details

Manufacturer	MAN
Model	E 3262 LE 202
Fuel Type	Natural Gas
Min. Methane Number	80
Cylinders	12
Aspiration	Turbocharged
Speed rpm	1500
Aftercooler	Yes

Hot Water Details

Max. Water In/Out Temp.	°C	78/90°C
Max. Water Flow Rate*	l/s	14.09
Max. Glycol Content	%	30
Connection Size	mm	100
Flange Type		PN16
Pressure Loss**	kPa	28.9
Max. Test Pressure	Bar	9.75

* Assuming Cp = 4.2 kJ/kg·K and ρ = 968.55 kg/m³

** Pressure loss figures stated are at max. water flow rate. Internal unit only.

Exhaust Details

Connection Size	mm	250
Flange Type		PN10
Outlet Temp***.	°C	120
Allowable Backpressure	Pa	1300
Allowable Backpressure with Catalyst	Pa	TBC

*** For engines with exhaust bypass, please request exhaust bypass temp. from ECPL.

Ventilation Details

Connection Size	mm	710
Ventilation Rate****	m^3/s	5.39
Max. Air Inlet Temp.	°C	30
Max. Air Outlet Temp.	°C	45
Enclosure Pressure Drop	Pa	210

**** Vent rate is stated at max. air outlet temp, 100kPa

Aftercooler Details

Max. Water Inlet Temp.	°C	42
Water Flow Rate	l/s	1.85
Connection Size	mm	40
Flange Type		PN16
Pressure Loss	kPa	200
Max. Test Pressure	Bar	6
Ethylene Glycol Content	%	45

Generator Details

Manufacturer		Stamford
Model		HCI634H-311
Type		Synchronous
Rating	kVA	940
Voltage	V	400
Phase	Ph	3
Frequency	Hz	50
Protection Class		IP23
Rated Power Factor	PF	0.8
Xd Dir. Axis Synchronous		2.7
X'd Dir. Axis Transient		0.23
X"d Dir. Axis Sub-Transient		0.16
T" Sub-Transient Time Const.		0.025
T'do O.C Field Time Const.		2.44
CHP Protection Device	A/Ph	TBC
Indicative Client Protection Device	A/Ph	TBC
Current Per Phase @ 0.8PF	A	929
Current Per Phase @ 0.95PF	A	788
Efficiency @ 0.8PF	%	95.7%
Efficiency @ 0.95PF	%	96.5%
Indicative Main Cable Size [a] †	mm^2	TBC
Indicative Earth Cable Size [b] †	mm^2	TBC

[a] 4-Core XLPE/SWA/PVC to BS5467, Max 50 meters.

[b] 1-Core 6491B to BS7211, Max 50 meters.

† Sizes and lengths based on IET 17TH Edition BS7671, Installation method 31.

Fuel Details

Connection Size	mm	65
Flange Type		PN16
Min/Max. Supply Pressure	mbar	25/50

Emissions @ 5% O2

NOx	mg/Nm^3	250
CO	mg/Nm^3	700
NOx (With Catalyst)	mg/Nm^3	<N/A
CO (With Catalyst)	mg/Nm^3	<TBC

Weight Details

Enclosure (Dry) STD/PREM.	See Sales Drawing
Container (Dry) STD/PREM.	See Sales Drawing

Noise Data

Enclosure SPL @ 1m SN/LN	dB(A)	70/64.92
Container SPL @ 1m SN/LN	dB(A)	75/65

NB: Output figures are based on operation at DIN ISO 3046-1 conditions with the exception of exhaust output, which is quoted to 120°C/180°C for Natural Gas/Biogas respectively, figures are stated from manufacturer's declared performance figures subject to the manufacturer's tolerances and subject to change without notice. Values for de-rated units are estimates only. Energy balance data assumes perfect combustion. All information detailed is for guidance only and is subject to change without notice due to our commitment to continuous improvement - all values should be confirmed with ENER-G Combined Power Ltd on a project specific basis.

T: +44 161 745 7450
F: +44 161 745 7457
www.energ.co.uk

Edison House
2 Daniel Adamson Road, Salford
Manchester, M50 1DT, UK

DOCUMENT ISSUE REGISTER

PROJECT REF: STDH – New Energy Center

PROJECT NO: 2976

ISSUED TO: John Bewick ; Keith Mason -Metnor

MALONE
mechanical services engineers

H. Malone & Sons Ltd
Gosforth Industrial Estate
Newcastle upon Tyne
NE3 1XL

T. 0191 2851176
F. 0191 2840630
E. enquiries@hmalone.co.uk
W. www.hmalone.co.uk

DAY	23	26	30	04	08	15	22	29	30	31	01	04	06					
MONTH	04	04	04	05	05	05	05	05	05	05	06	06	06					
YEAR	18	18	18	18	18	18	18	18	18	18	18	18	18					
FORMAT	E	E	E	E	E	E	E	E	E	E	E	E	E					

P = POST E = EMAIL H = HAND CD = CD F = FAX

DOCUMENT TITLE	REVISION
TS001; Jeremias – Multicore Chimney, design input & summary Sheet, base plate & holding down bolt stress calculation	X A
TS002; Ener-G – Drawing 21924; CHP unit drawing; APPROVAL/ COMMENT	X
TS003 Honeywell Fire Alarm Components; APPROVAL/ COMMENT	X
TS004; Phenolic 50mm thick bracket insert, Roller and Chair for LTHW 250mm mains in duct.	X
TS005; Flue D1 Calculation	X
TS006; Intruder Alarms	X
TS007; CHP Unit; Provisional Technical Submission	X
TS008; Ingham Report	X A
TS009; Theatre Report	X A
TS010; Drawing 2976_M_704	2
TS011; Mistras Magnetic Particle Examination Procedure MPI 1.2 Rev 03.	X
TS012; Access Control Equipment	X
TS013; LPC Switchgear Ltd; Section Board Drg Q9285B (2 Pages) ; Main switchboard Drg Q9285A (2 Pages)	X
TS014; Hepple Lightning Protection Layout; 4238/E/801 Rev 0	X
TS015; Hepple CCTV equipment	X
TS016; Hattersley Valves	X
TS017; SPECIALIST FLUE DESIGN	X
TS018; STEAM AND CONDENSATE REPORT	X
TS019; External Perimeter Lighting	X
TS020; District Heating Report	X
TS021; Jeremias Flue Chimney System; Wind Shield Drawings 3314-3 & 3314-4 Rev P0.	X P1

H. Malone & Sons Ltd
Gosforth Industrial Estate
Newcastle upon Tyne
NE3 1XL

T. 0191 2851176
F. 0191 2840630
E. enquiries@hmalone.co.uk
W. www.hmalone.co.uk

MALONE
mechanical services engineers

SOUTH TYNESIDE DISTRICT HOSPITAL NEW ENERGY CENTRE


TECHNICAL SUBMISSION

Date: 06/06/2018


Number: TS 021 Rev A

For: Approval/ Comment

Description: Jeremias Flue Wind Shield Drawing
3314-3 P1
3314-4 P1
Branch Height Revision




View on B
Door Arrangement

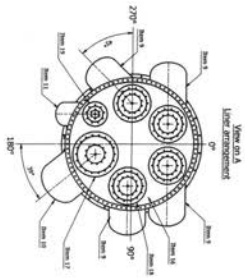


View on A
Lower Arrangement

REF. NO	DESCRIPTION TABLE Description	Quantity
1	2000 (OD) Flue Terminate Reducer (OD) 700mm Reducer H/D 2100mm	1
2	10mm Thick S275 JR Steel Chimney Gusset Dimensions according to calculations	24
3	6mm S275 JR Steel Access Door 395x715mm Door plate	1
4	Drain Box External drainage by others	1
5	200(W) S275 JR Bracket Flat Channel	6
6	250x10mm Thick S275 Steel Support Band	1
7	1mtr lift Liner Pipe	1
8	6mm Thick 304 Stainless Steel Liner with 50mm Lorwilla Insulation	2
9	6mm Thick 304 Stainless Steel Liner with 50mm Lorwilla Insulation 1mtr ID 500mm	4
10	6mm Thick 304 Stainless Steel Liner with 50mm Lorwilla Insulation 1mtr ID 250mm	1
11	6mm Thick 304 Stainless Steel Liner with 50mm Lorwilla Insulation	1
12	6mm Thick S275 Steel Gable Plate with Slotted Set	3
13	6mm Thick 304 Stainless Steel Slider Plate 200x80mm	24
14	2000 (OD) Flue Terminate Flange H/D 700mm Flange S/D 700mm Flange PCD 740mm	4
15	6mm Thick 304 Stainless Steel Slider Plate	48
16	6mm Thick S275 500mm Domed Top Cap Fixed with M10 x 30mm Stainless Steel Countersunk	1
17	Saddle for 700mm ID Liner	1
18	Saddle for 500mm ID Liner	1
19	6mm Thick 304 Stainless Steel Downspout	4
20	Saddle for 300mm ID Liner	1
21	INTERNAL "J" Type "Fast Fit" Aerial ladder system over the full height of the flue. Standard tube/rung/bracket configuration. Rungs at 300mm centres. Brackets at 1.5 metre centres.	1

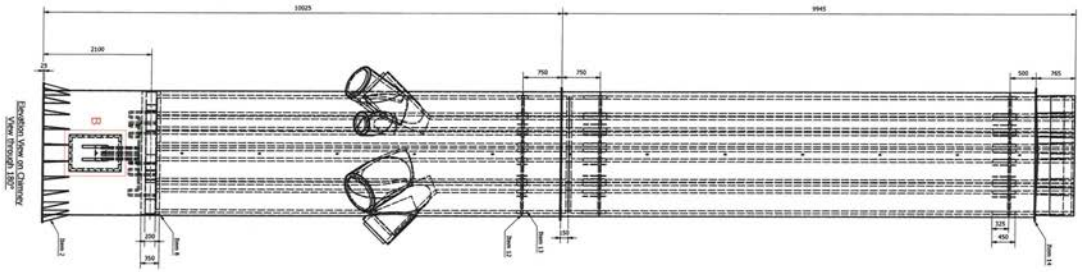

Elevation View on Chimney
View through 180°

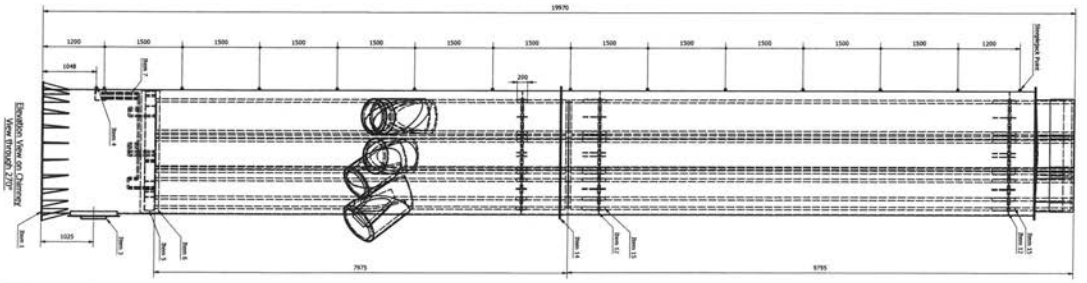

Elevation View on Chimney
View through 270°

IF IN DOUBT ASK

MANUFACTURED TO EXECUTION CLASS LEVEL: 2

CONTRACT EXCLUSIONS

All builders work - Internal/External

All scaffolding and/or access equipment over 3 metres in height to be supplied by the client at the time of installation.

If the flashing/s are to be supplied by JEREMIAS UK LTD. All roof openings and weather by the clients roofing contractor at the time of installation. If storm collar is removed after our visit, and found to leak at a later date, we shall not be held responsible.

JEREMIAS UK LTD accept no responsibility for any services or fittings installed between our site survey and installations which obstruct the flue run, the supports or installation access.

JEREMIAS UK LTD are not responsible for any electrical wiring to our installed equipment.

Any notes contained on this drawing concerning removal of pipes, cable trays ect. must be adhered to prior to our installation.

Pipework from drain points.

Foundation Loads (Non-Factored)
Overturning Moment - 1137.872 kNm
Windshear at base 69.729 kN
Approximate self weight - 165#1.329kg OR 162.239 kN

No.	Revision	Date	Drn
P-1	Branch Height Revision	5/6/18	AP

Project: South Tyneside Hospital Chimney

Drawing Title: Chimney Overview GA

Customer: H Malone and Sons

Site Address: Harton Ln, South Shields, NE34 0PL


Tolerance Level: Execution Class 2


Welding check	Dimension Check	Final Sign off


Date	Drawn By	ISSUE PURPOSES
5/6/2018	A.P	PRICE APPROVAL / CONSTRUCTION / AS INSTALLED


Drawing No	Revision	Scale
3314-3	P-1	Do Not Scale

jeremias chimney systems HETAS CE

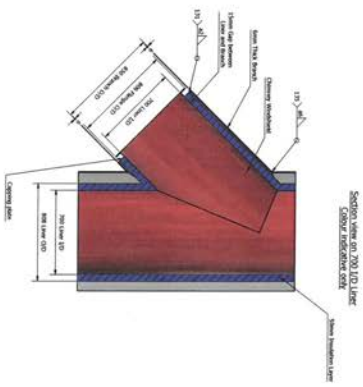

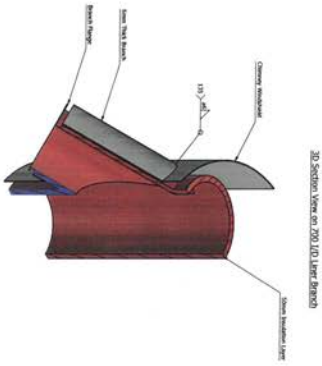

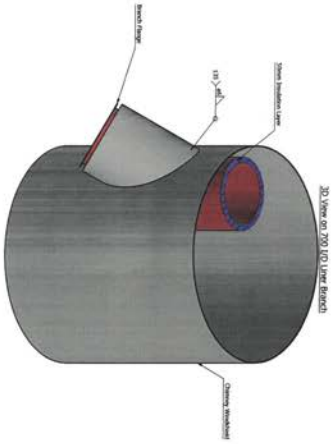

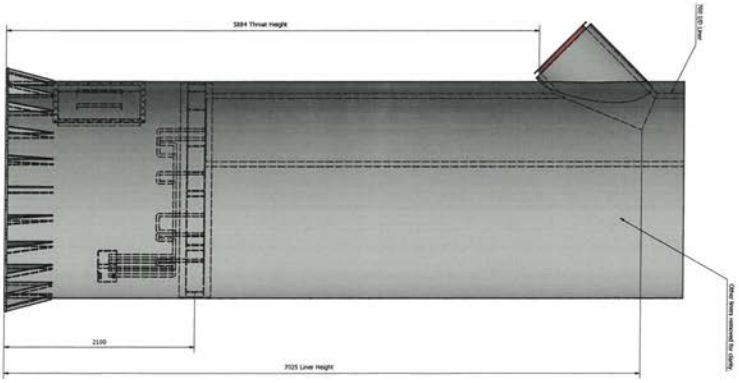

IF IN DOUBT ASK

MANUFACTURED TO EXECUTION CLASS LEVEL: 2

CONTRACT EXCLUSIONS

All builders work - Internal/External

All scaffolding and/or access equipment over 3 metres in height to be supplied by the client at the time of installation.

If the flashing/s are to be supplied by JEREMIAS UK LTD, All roof openings and weather by the clients roofing contractor at the time of installation. If storm collar is removed after our visit, and found to leak at a later date, we shall not be held responsible.

JEREMIAS UK LTD accept no responsibility for any services or fittings installed between our site survey and installations which obstruct the flue run, the supports or installation access.

JEREMIAS UK LTD are not responsible for any electrical wiring to our installed equipment.

Any notes contained on this drawing concerning removal of pipes, cable trays ect. must be adhered to prior to our installation.

Pipework from drain points.

Foundation Loads (Non-Factored)

Overturning Moment - 1137.872 kNm
Windshear at base 69.729 kN
Approximate self weight - 16541.329kg OR 162.270 kN

No.	Revision	Date	Drn
P-1	Branch Height Revision	5/6/18	AP

Project: South Tyneside Hospital Chimney

Drawing Title: Branch Detail Drawing

Customer: H Malone and Sons

Site Address: Harton Ln, South Shields, NE34 0PL

Welding check | Dimension Check | Final Sign off

Date	Drawn By	
5/6/2018	A.P	FIRST PRIMARY / FOR APPROVAL / CONSTRUCTION / AS INSTALLED

Drawing No	Revision	Scale
3314-4	P-1	Do Not Scale

Tolerance Level: Execution Class 2


Foundation Class 1: +/- 2mm

Foundation Class 2: +/- 2mm

Non-Foundation Class: +/- 5mm


jeremias chimney systems

HETAS

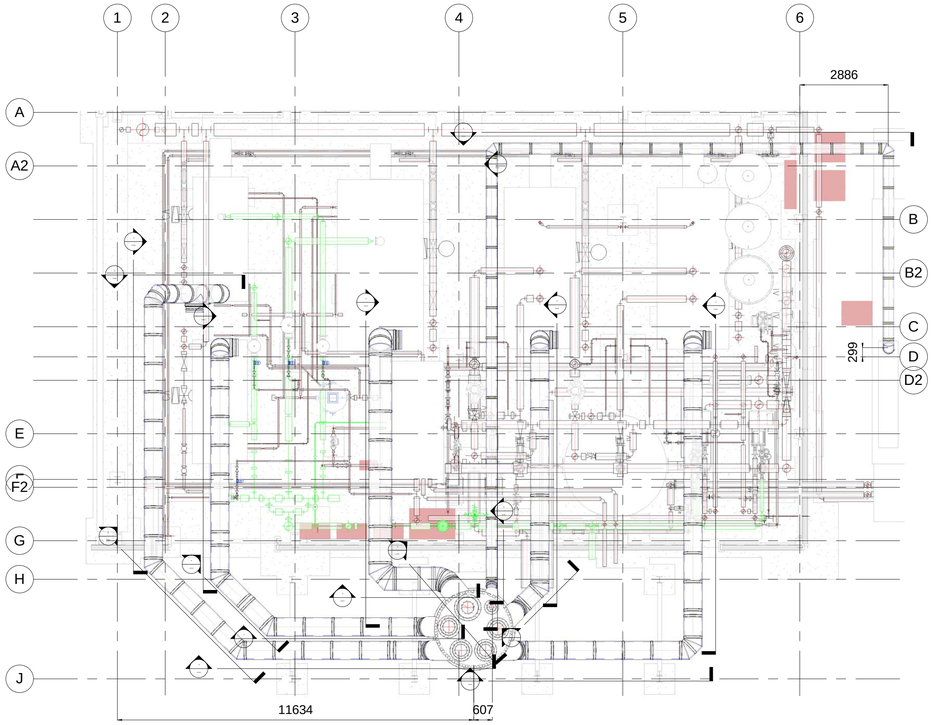


1 0 - Flue Copy 1

1 : 100

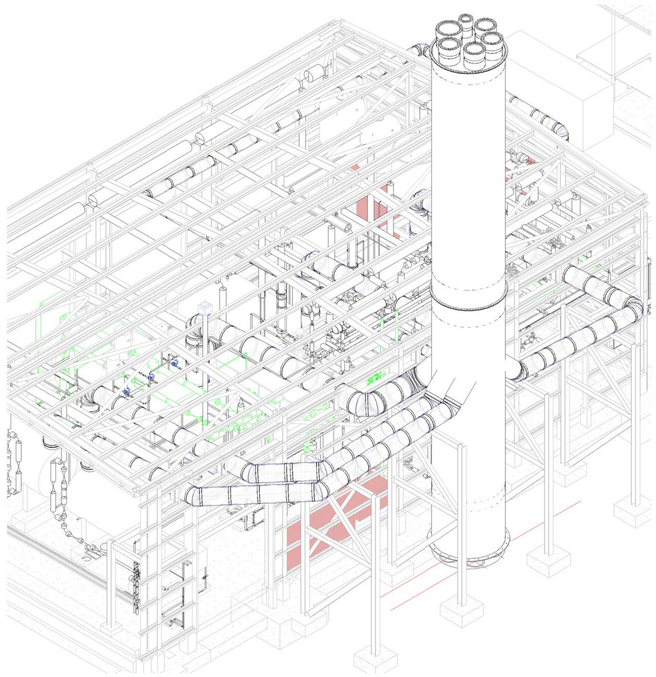


4 3D

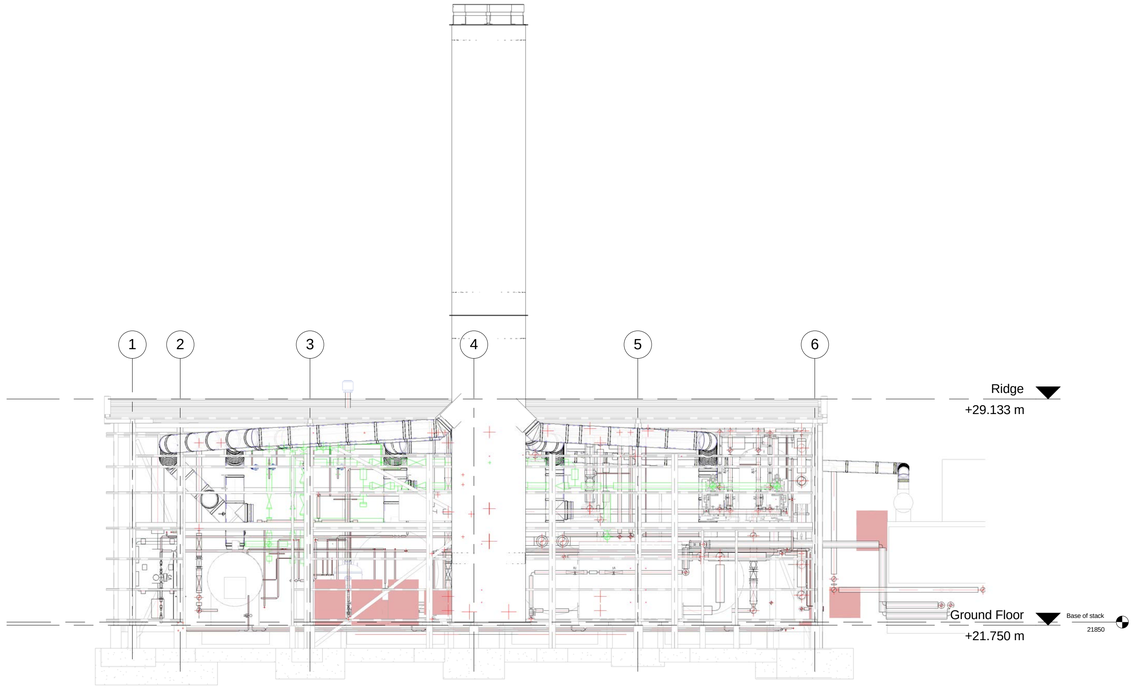

2 South - Flue

1 : 100

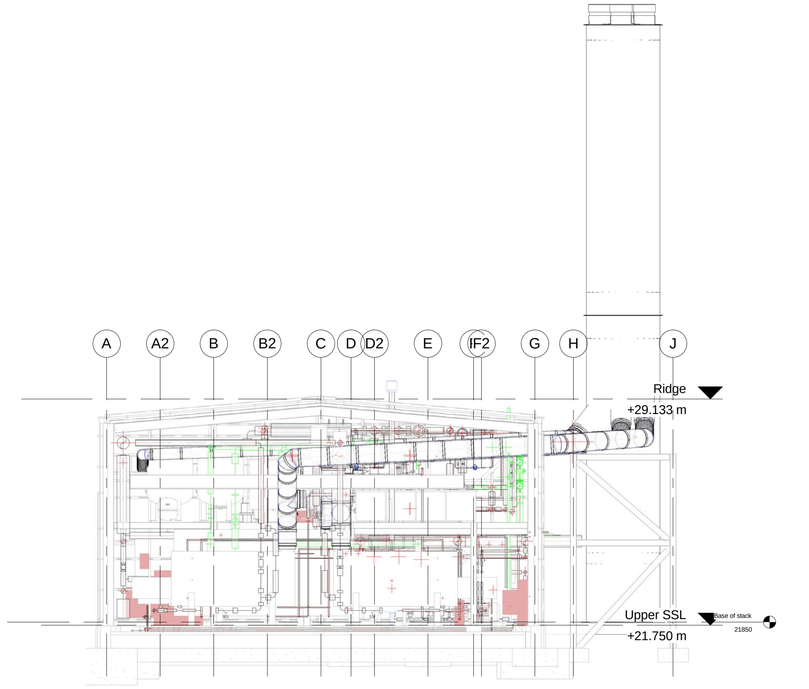

3 West - Flue

1 : 100

jeremias chimney systems

CONTRACT EXCLUSIONS/STANDARD NOTES

All builders work - Internal/External

All scaffolding and/or access equipment over 3 metres in height to be supplied by the client at the time of installation

If the flashing/s are to be supplied by JEREMIAS UK LTD. All roof openings and weathering by the clients roofing contractor at the time of installation.If storm collar is removed after our visit , and found to leak at a later date,we shall not be held responsible.

JEREMIAS UK LTD accept no responsibility for any services or fittings installed between our site survey and installations which obstruct the flue run,the supports or installation access.

JEREMIAS UK LTD are not responsible for any electrical wiring to our installed equipment.

Any notes contained on this drawing concerning removal of pipes, cable tray's etc. must be adhered to prior to our installation.

Pipework from drain points. All drains within the system will require pipe work by others to gulleys.

For all termination heights and final position of our flue systems, you must seek approval from the relevant local Environmental officer, in line with the current regulations using either Clean Air Act (and memorandum)/LAQM (09)/D1 Ministry of Pollution dependant on the appliances being selected for the project. We at Jeremias are not responsible for sourcing the necessary approvals, we can only presume at the time of this tender, it has obtained already by the professional team.

We presume the building structure is capable of taking all the necessary imposed loads of the expansion devices/lateral load/weight bearing brackets.

Unpon receipt of drawing approval, manufacture will proceed in accordance with the details and dimensions shown on this drawing. It is the clients responsibility to ensure that the flue route is kept clear from obstruction by others services. Please ensure that this drawing is issued to your site contract manager.

Please ensure this flue route is passed on to your appliance manufacturer to avoid any issues at commissioning and to ensure that the proposed flue route is suitable for the appliance/s. By design we can prove that this flue system works within the appliance characteristics available in their literature, however information is not always available within their literature for every eventuality/site conditions for the flue route. if they decline to comment (saying they are not flue specialists) and there is an issue at commissioning stage, then any costs for recommendations by themselves to correct the flue system will be passed onto yourselves.

Without confirmation/comments we will not proceed with manufacture.

SPECIFIC PROJECTS NOTES

Please note their will be signs of pluming on this type of system at the flue outlet.

Please be aware BS EN 15287 and IGE UP10 (edition 4) calls for flues to be laid to a fall which is important when dealing with condensing and high efficiency appliances. This is also a requirement of most boiler manufacturers installation instructions. please bear this in mind when selecting appliances and designing/laying out the flue runs as we cannot be held responsible for any problems if the required fall is not available.

Please note that due to the length of the horizontal flue run, it has not been possible to allow for a 3deg fall back to the boilers, so therefore we can not be held responsible to any future leaks within this area.

Rev	Description	Date	By
A	Datum level alteration	05/06/18	

Preliminary	For Approval	X	Construction	As Constructed

Drawing No: 7466 - 001

REV: A

Systems Materials:
Boiler: DW-ECO 304
CHP: DW-FS 316

Scale: 1 : 100 @ A1 (DO NOT SCALE)

Drawn By: J.meynell

Date: 01/06/18

Title: Boiler & CHP Flue

Customer: H Malone & Sons Ltd

Project: South Tyneside District Hospital

Site Address:
Horton Lane
South Shields
NE34 0PL

This drawing remains the property of Jeremias UK Ltd. This drawing may NOT be reproduced, copied, lent, borrowedor sold without express permission of Jeremias UK Ltd.