
FOUL DISCHARGE POINT TBC.
CONNECTION SUBJECT TO ACCEPTANCE
FROM NWL AND S106 AGREEMENT


CELLULAR STORAGE STRUCTURE 0.8M DEEP
WITH A MIN 0.5m COVER TO BE MAINTAINED
BY A MANAGEMENT COMPANY.
IL 13.000 STORAGE VOLUME = 82.5m³
BASED ON A 95% VOID RATIO
STORAGE AREA 108.5m²

SURFACE WATER DISCHARGE POINT TBC.
CONNECTION SUBJECT TO ACCEPTANCE
FROM NWL AND S106 AGREEMENT

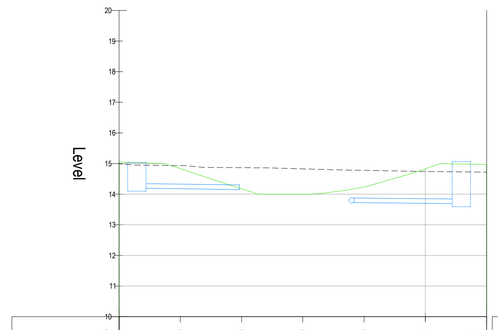

Chainage	00.000	02.000	04.000	06.000	08.000	10.000	12.000
Existing Levels	14.989	14.934	14.865	14.826	14.778	14.740	14.720
Proposed Levels	15.051	14.832	14.175	14.000	14.231	14.829	14.968
Surface Water CL	SW06 15.031		HW01		HW02		SW05 15.005
Surface Water IL	14.200		14.150		13.725		13.690
Surface Water Details		150Ø 1:67 3.352m				150Ø 1:136 4.763m	

1-1 - LONGSECTION
SCALE: H 1:100,V 1:100. DATUM: 10.000

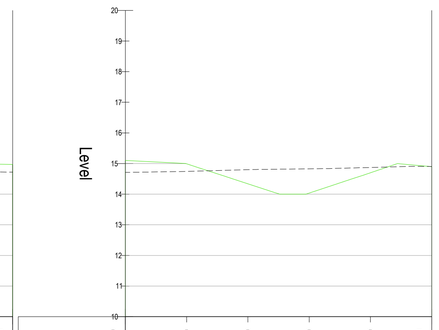

Chainage	00.000	02.000	04.000	06.000	08.000	10.000	
Existing Levels	14.710	14.745	14.799	14.828	14.872	14.904	
Proposed Levels	15.101	14.991	14.338	14.035	14.899	14.896	

2-2 - LONGSECTION
SCALE: H 1:100,V 1:100. DATUM: 10.000

PROPOSED BIORETENTION AREA.
WITH 1:3 SIDE SLOPES AND PLANTED BASE

SETTLEMENT BASIN LEVEL= 14.000

INLET LEVEL = 14.150
OUTLET LEVEL = 13.725

KEY

- SITE BOUNDARY
- MAJOR CONTOUR
- MINOR CONTOUR
- 1:21 PROPOSED GRADIENT
- 46.872 EXISTING LEVELS
- 45.950 PROPOSED LEVELS
- SW## CL 0.000 IL 0.000 PROPOSED ADOPTED SURFACE WATER
- CW## CL 0.000 IL 0.000 PROPOSED ADOPTED COMBINED WATER
- FC PROPOSED FLOW CONTROL
- PROPOSED CELLULAR STORAGE
- PROPOSED BIORETENTION AREA
- PROPOSED PERMEABLE BLOCK PAVING
- 150Ø 1:150 PROPOSED PRIVATE SURFACE WATER
- SWMH CL 0.000 IL 0.000 PROPOSED PRIVATE SURFACE WATER MANHOLE
- SWIC CL 0.000 IL 0.000 PROPOSED PRIVATE SURFACE WATER PPIC
- PROPOSED PRIVATE SW ACCESS CHAMBER (300Ø)
- PROPOSED 0.3MØ CATCHPIT
- DU PROPOSED PERMEABLE PAVING SKELETANK DIFFUSER UNIT
- 150Ø 1:150 PROPOSED PRIVATE FOUL WATER
- FWIC CL 0.000 IL 0.000 PROPOSED PRIVATE FOUL WATER PPIC
- PROPOSED PRIVATE FW ACCESS CHAMBER (300Ø)

GENERAL SAFETY NOTES:

1. WHERE THE BASE (ROAD BASE) HAS BEEN USED AS A TEMPORARY RUNNING SURFACE DURING THE CONTRACT IT SHALL BE THOROUGHLY CLEANED AND POWER WASHED AS NECESSARY. AFTER DRYING AND IMMEDIATELY BEFORE THE BINDER COURSE IS LAID A TACK COAT OF BITUMEN EMULSION CLASS A1-40 OR K1-40 TO BS434 SHALL BE APPLIED AT A RATE OF 0.35-0.55 LITRES/SQ.METER.
2. ALL RADIUS KERBS WITH A RADIUS OF 12m OR LESS SHALL BE FORMED WITH PROPRIETARY RADIUS KERBS.

HEALTH & SAFETY:

1. CONTRACTOR SHOULD BE AWARE OF GENERAL CONSTRUCTION RISKS TO PREVENT SLIPS, TRIPS AND FALLS AND TAKE NECESSARY PRECAUTIONS WITHOUT SPECIAL INSTRUCTION.

ROADS & DRAINAGE:

2. CONTRACTOR TO PROVIDE TRENCH SUPPORTS AS APPROPRIATE AND ENSURE THAT PLANT REMAINS A SAFE DISTANCE FROM TRENCHES PRIOR TO INSTALLING DRAINAGE
3. THE TIME THAT EXCAVATIONS ARE OPEN ON SITE SHOULD BE KEPT TO A MINIMUM AND ALL TRENCHES SHOULD BE SURROUNDED BY A BARRIER.
4. CONNECTIONS TO EXISTING SEWERS TO BE MADE BY APPROVED CONTRACTOR ONLY.
5. CONTRACTOR TO MAKE OPERATIVES AWARE OF ASSOCIATED DANGERS TO HEALTH SUCH AS LEPTOSPIROSIS (WEILS DISEASE) AND RECOMMENDED PRECAUTIONS. ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING TO BE PROVIDED AS REQUIRED.
6. UNFINISHED MANHOLES MUST BE COVERED WITH LOAD BEARING MATERIALS AND SURROUNDED WITH BARRIER.

PIPES & CABLES

7. CONTRACTOR TO OBTAIN ALL SERVICE RECORDS PRIOR TO WORKS COMMENCING.
8. SERVICE RECORDS TO BE REFERRED TO PRIOR TO WORK COMMENCING. CONTRACTOR TO PROCEED WITH CAUTION AND SERVICES TO BE LOCATED BY HAND DIG AND PROTECTED ACCORDINGLY.

EXCAVATION/FILL

9. CONTRACTOR TO ENSURE RELEVANT MEASURES ARE TAKEN TO KEEP PLANT AND PEOPLE A SAFE DISTANCE FROM STEEP SLOPES DURING THE WORKS.
10. CONTRACTOR TO ENSURE THAT PROCEDURES ARE IN PLACE TO KEEP PEOPLE A SAFE DISTANCE FROM WORKING PLANT WHERE NECESSARY.
11. CONTRACTOR TO REFER TO GROUND INVESTIGATION REPORT FOR CONTAMINATION TESTS AND TO PROVIDE ADEQUATE WELFARE FACILITIES AND PROTECTIVE CLOTHING AS REQUIRED.

DESIGN NOTES:

1. ALL WORKS TO COMPLY WITH CURRENT VERSION OF THE FOLLOWING DOCUMENTS:
   - DESIGN MANUAL FOR ROADS AND BRIDGES (DMRB)
   - SPECIFICATION FOR HIGHWAY WORKS (SHW)
   - LOCAL AUTHORITY DESIGN GUIDE AND SPECIFICATION
2. PRIOR TO COMMENCING WORKS THE CONTRACTOR SHOULD INVESTIGATE AND LOCATE AS NECESSARY ANY STATUTORY UNDERTAKERS EQUIPMENT WITHIN THE NEW ACCESS AND DISCUSS REQUIREMENTS FOR LOWERING/DIVERSION AND PROTECTION WITH THE RELEVANT UNDERTAKER.
3. ALL WORKS WITHIN THE PUBLIC HIGHWAY TO MEET LOCAL AUTHORITY REQUIREMENTS. CONTRACTOR TO APPLY FOR ROAD OPENING NOTICES ETC AS REQUIRED.
4. CBR VALUE NOT AVAILABLE. ROAD CONSTRUCTION DETAIL SUBJECT TO CONFIRMATION OF CBR VALUES. CONTRACTOR TO ALLOW FOR LAB TESTS TO BE UNDERTAKEN IN AGREEMENT WITH LOCAL AUTHORITY HIGHWAY ENGINEER PRIOR TO WORKS COMMENCING.
5. PROPOSED LEVELS HAVE BEEN BASED ON THE EXISTING TOPOGRAPHICAL SURVEY PROVIDED BY THE CLIENT.
6. PROPOSED DRAWING BASED ON THE LATEST ARCHITECTURAL LAYOUT PROVIDED BY THE CLIENT.
7. SLOPES GREATER THAN 1 IN 6 MAY REQUIRE STABILISATION. GEOTECHNICAL ENGINEER TO BE CONTACTED TO CONFIRM REQUIREMENTS

DRAINAGE NOTES:

1. ALL PIPES 100Ø UNLESS OTHERWISE STATED.
2. ALL PRIVATE TO ADOPTABLE CONNECTIONS 150Ø UNLESS OTHERWISE STATED.
3. ALL PPIC'S IN TRAFFICKED AREAS TO HAVE D400 COVERS & CONCRETE SURROUND.
4. ALL INTERNAL PLOT DRAINAGE REQUIRES CONFIRMATION PRIOR TO CONSTRUCTION.
5. CONTRACTOR TO CONFIRM MH COVER & INVERT LEVEL OF PROPOSED CONNECTION POINT PRIOR TO CONSTRUCTION. ANY VARIATION TO BE REPORTED TO ENGINEER.
6. THE INVERT LEVEL OF THE EXISTING SEWERS ARE TO BE VERIFIED PRIOR TO COMMENCEMENT OF ANY DRAINAGE WORKS. ANY DISCREPANCY MUST BE NOTIFIED TO THE ENGINEER.
7. EXISTING MANHOLES TO BE MODIFIED TO ACCOMMODATE THE PROPOSED LATERAL CONNECTIONS. CONTRACTOR TO APPLY TO THE WATER AUTHORITY FOR THE SECTION 106 APPROVAL TO MAKE THE CONNECTIONS. PIPES ARE TO BE LAID WITH COMMON INVERT LEVELS.
8. ALL STUB PIPES ARE TO BE CAPPED.
9. ALL PIPES CONNECTIONS TO BE SOFFIT TO SOFFIT UNLESS STATED OTHERWISE. REFER TO MANHOLE SCHEDULE FOR FURTHER INFORMATION.
10. ALL PROPOSED FILTER DRAINS TO CONNECT BACK INTO PLOT DRAINAGE.

PIPE MATERIALS

- **100-225Ø: UPVC PIPES TO BE BSI KITEMARKED AND CERTIFIED TO WIS 4-35-01 & BS/EN13476.**

SUBJECT TO LOCAL AUTHORITY & WATER AUTHORITY APPROVAL

DRAINAGE SUMMARY:

SURFACE WATER
- SURFACE WATER IS RESTRICTED TO 3L/S.
- SURFACE WATER IS TO DISCHARGE INTO THE EXISTING SURFACE WATER SEWER
- ATTENUATION FOR ALL STORM EVENTS UP TO AND INCLUDING 100YR STORM EVENT +45% CLIMATE CHANGE AND 10% CREEP IS TO BE PROVIDED BY AN ON-LINE CELLULAR STORAGE CRATE.
- HIGHWAY DRAINAGE TO DISCHARGE VIA PRIVATE NETWORK
- FINAL DISCHARGE POINT TBC, CONTRACTOR TO UNDERTAKE S106 AGREEMENT

FOUL WATER
- FOUL WATER IS TO DISCHARGE INTO EXISTING ADOPTED NWL COMBINED SEWER
- FINAL DISCHARGE POINT TBC, CONTRACTOR TO UNDERTAKE S106 AGREEMENT

SW09 HYDROBRAKE DETAILS

REFERENCE: MD-SHE-0082-3000-1000-3000
DESIGN HEAD: 1.00m
ORIFICE SIZE: 82mm
DESIGN FLOW: 3 l/s
INVERT LEVEL: 12.975m

TECHNICAL SPECIFICATION		
CONTROL POINT	HEAD (m)	FLOW (l/s)
PRIMARY DESIGN	1.000	3.000
FLUSH - FLO	0.297	2.994
KICK - FLO	0.623	2.418
MEAN FLOW		2.624

17.01.2024	STORAGE VOLUMES UPDATED.	AM	RWO	5
13.12.2023	BIORETENTION AREA SECTIONS ADDED.	AM	RWO	4
31.08.2023	UPDATED TO LATEST LAYOUT.	AM	RWO	3
22.08.2023	UPDATED TO SHOW BIORETENTION AREA	AM	RWO	2
20.03.2023	FIRST ISSUE	AM	RWO	1
Date	Revisions	Drawn	Checked	Rev

Dwg Status: SCHEMATIC

NORTH EAST
0191 2585632

YORKSHIRE
0113 535 3500

RWO CONSULTING ENGINEERS
WWW.RWO.GROUP
INFO@RWO.GROUP

Client: ORIGIN PLANNING SERVICES

Project: SIMONSIDE ARMS

Title: PROPOSED ENGINEERING

DO NOT SCALE	Scale @ A0: 1:100	Drawn AM	Checked RWO	Date 20.03.2023
Job No 22164		Dwg No D001		Rev 4