LEGEND:

- Proposed Hedging
- Proposed Specimen Trees
- Proposed Shrubs
- Site Boundary

NOTES:

- For Planting Schedule see drawing number 5576-93-106
- All works to be carried out in accordance with best horticultural practice and to the latest British Standards.
- All existing vegetation to be retained shall be identified and protected prior to works commencing on site.
- Planting within sightlines shall not exceed 600mm height, standard trees shall be aligned so that their stems do not present a 'wall' within visibility splays.
- No tree planting shall occur within 2m of underground services or drainage runs without tree root management product by Greenleaf (or similar approved), or within 2m of overhead cables.
- All topsoil to BS 3882: 1994 'Premium Grade', ameliorated with fertilizer and soil conditioner.
- All Extra Heavy and Select Standard trees to be planted in prepared pits, min 1000mm dia x 1000mm deep with min 150mm clearance around rootball, backfilled with ameliorated topsoil. All trees to be securely staked.
- Ornamental shrubs will be planted in prepared 450mm deep beds, backfilled with ameliorated topsoil
- Grass seeding to be carried out on prepared seedbed, topsoil min depth 150mm.
- All planting to be carried out 'in season' (November to March). Program may require preparation of planting areas during the summer but these will remain mulched and maintained in weed-free condition until the earliest appropriate planting season. Should programs require planting 'out of season' all stock will be watered-in before and after planting.
- All planting subject to minimum 12months concurrent maintenance and defects liability period.

SHEET LOCATION PLAN:

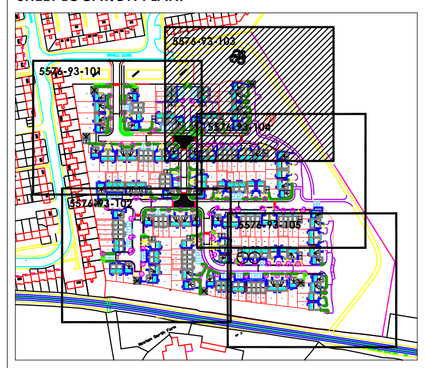

Rev.	Drawn	Date	Comments
D	FW	18.12.15	Planting amendments in line with service layouts
C	FW	21.10.15	Planting amendments in line with updated layout
B	SN	09.08.13	Planting amendments
A	SN	10.07.13	Planting amendments

North

Robinson Landscape Design
Cathedral Buildings, Dean Street
Newcastle upon Tyne NE1 1PG
Tel: 0191 230 4339 Fax 0191 230 5509
info@robinsonlandscapedesign.co.uk

Project
BIDDICK_HALL

Drawing name
DETAILED_PLANTING_PROPOSALS

Drawing No:		Scale at A1:
5576-93-103		1:200
Drawing Location: S:\5576-BIDDICK_HALL\RLD\RLD\19-SOFT_WORKS		
Drawn: SN	Checked: TR	Date: 23/05/2013