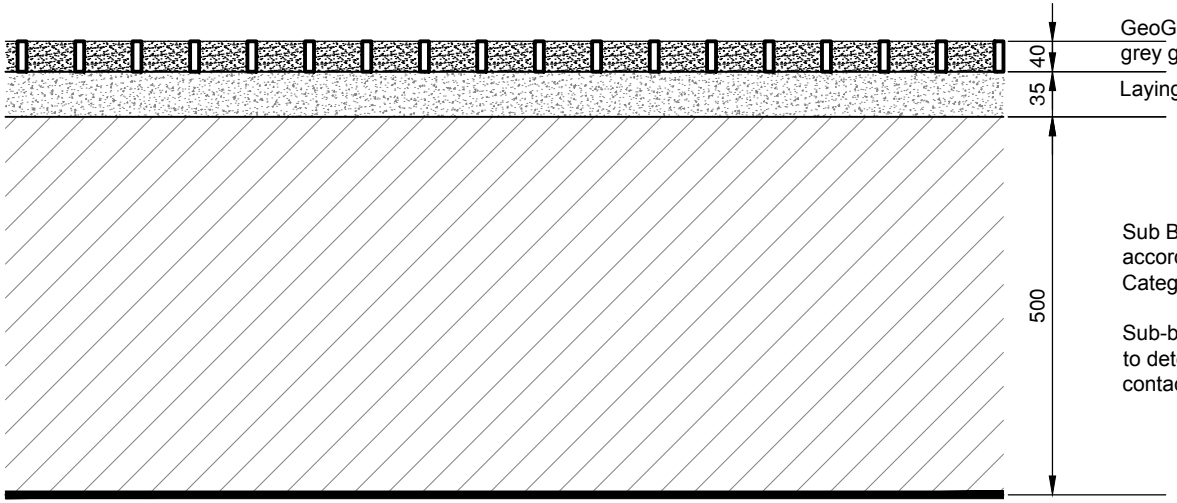

GeoGrid Cellular Paving System filled with 20mm Angular light grey gravel

Laying Course - Category II, in accordance with BS 7533-3.

Sub Base Material - Type 1 Granular Material, in accordance with SHW. Based on insitu CBR of 3.0%, Category IV - BS7533.

Sub-base foundations based on 3.0% cbr, site conditions to determine final cbr value. if cbr value on site is different contact engineer.

MARSHALLS M380 TANKING MEMBRANE

Overflow Parking - Geogrid Cellular System

Scale 1:10