Technical information

Flush sash casement



modus flush sash windows in Anteak offer a quality, natural woodgrain appearance to rival timber

modus flush sash casement windows offer internally and externally flush sashes for an aesthetic to rival timber systems. A range of woodgrain foils means you can achieve a truly natural woodgrain appearance, without the associated costs. It is the first co-extruded flush sash on the UK market, and offers better thermal performance than traditional timber windows.

Min / max sizes	Width (mm)	Height (mm)
Top hung (espag)	Min: 320 Max: 1200	Min: 375 Max: 1350
Side hung	Min: 400 Max: 750	Min: 320 Max: 1500
Fixed	Max: 3000 Combined width and height 5400	Max: 2400

Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Krypton	SuperSpacer Premium	Full Thermal	A	9	0.7
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	31	0.8
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	None	A	12	1.3
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	None	A+	13	1.3

Contact our Technical department for additional performance specifications

75mm.

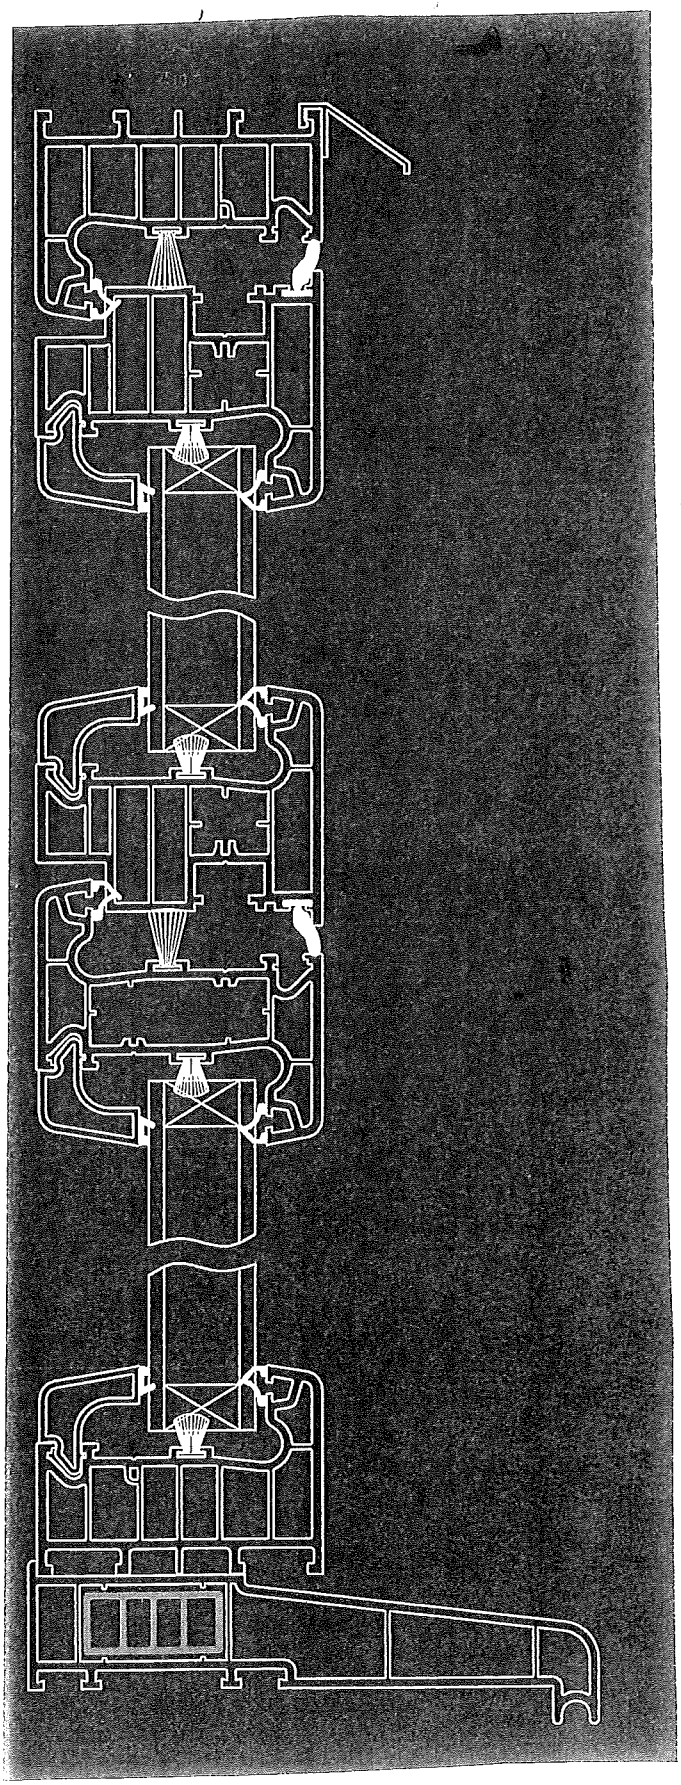

105mm.

120mm. (WHERE WINDOW PATTERN INCLUDES A TRANSOM)

55mm.

1:2 SCALE UPVC CASEMENT WINDOW