DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING :-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE :-
ALL SIGNAGE TO CONFORM TO BS 8300:2001 SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206.
ALL ELECTRICAL WORK CONFORMS TO BS 7671.

IT IS ASSUMED THAT ALL PRELIMINARY WORKS CARRIED OUT / CONTRACTED BY THE SITE OWNER (SHOULD THEY BE REQUIRED BY THE PROJECT) ARE COMPLETED IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS 2010 AND AMENDMENTS THEREAFTER

SITE NOTES

FLOOR CONSTRUCTION:
CONCRETE


FORM APERTURE IN EXISTING BRICKWORK

INSTALL: STEEL APERTURE LINERS, CAVITY CLOSERS, ATM ENCLOSURE, 26MM FLOOR PLATE, ATM, ELECTRICS - NEW DIS. BOARD AND PTU NON-ILLUMINATED DI-BOND SIGNAGE


NOTES:
- NO ASBESTOS REG. - CSS TO ARRANGE ASBESTOS SURVEY PRIOR TO WORKS COMMENCING
- FULL SERVICE CLEARANCE NOT ACHIEVABLE - CASH ZONE TECH SUPPORT ALREADY APPROVED
- NON-STANDARD KEY NO. 5 DIMENSION / 961MM

WORK TO BE CARRIED OUT BY OTHERS


REMOVE 1X SHELF ABOVE ATM LOCATION TO BE ABLE TO FIT ATM ENCLOSURE PRIOR TO INSTALL
RELOCATE 1X TV MONITOR & ANY LOOSE STOCK FROM ATM LOCATION & BACK OF THE DOOR FOR DELIVERY OF THE ATM PRIOR TO INSTALL



EXISTING (PART) PLAN

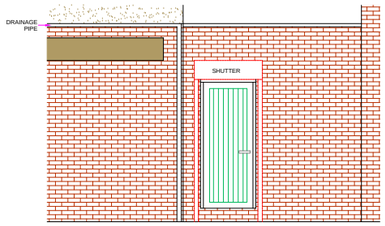


EXISTING ELEVATION




EXISTING SECTION VIEW A-A




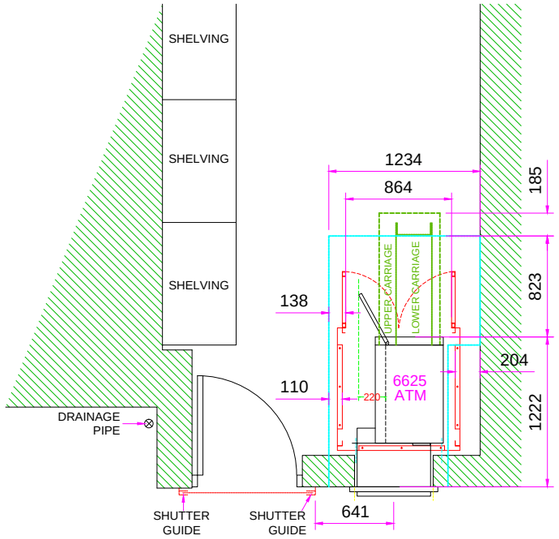


PROPOSED (PART) PLAN

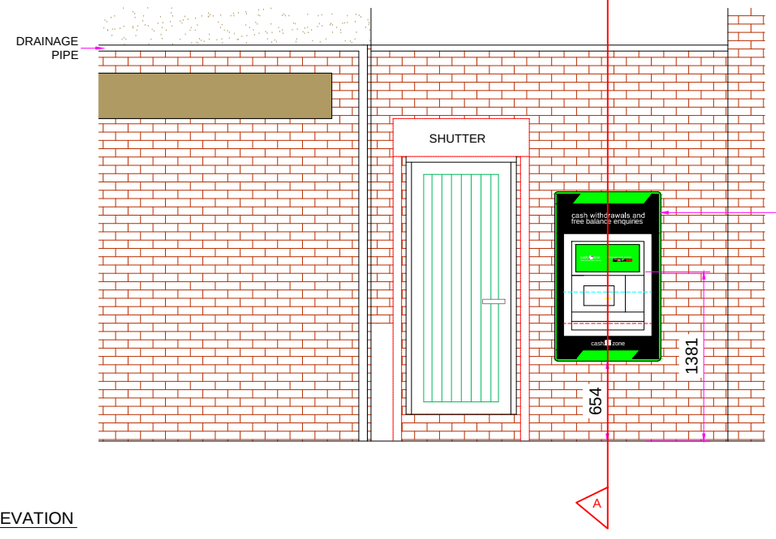

PROPOSED ELEVATION

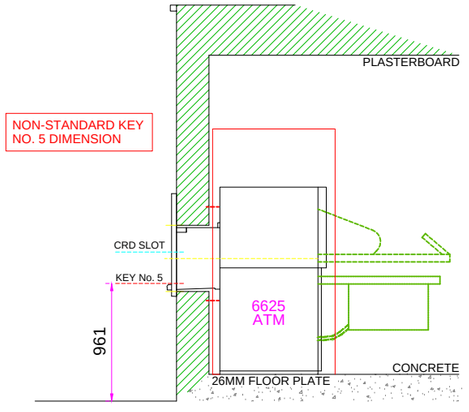

SECTION VIEW A-A



SITE ADDRESS
HEBBURN MINI MARKET
28 VICTORIA ROAD EAST
HEBBURN, NEWCASTLE-UPON-TYNE
NE31 1XQ

TITLE
PROPOSED AUTOMATED TELLER MACHINE (ATM)
INSTALLATION FOR CASHZONE

DRAWN	DATE	SCALE
MK	13/10/2022	VARIOUS @A3
REF/DRG No.	SHEET	REVISION
E025494		01

REVISION	DESCRIPTION	DATE	BY
04			
03			
02			
01	CHANGED SIGNAGE TO NON-ILLUMINATED	15/05/24	NG

drawing approval

NAME:-
POSITION:-
APPROVED:-
DATE:-
SIGNED:-

CARDTRONICS Service Solutions